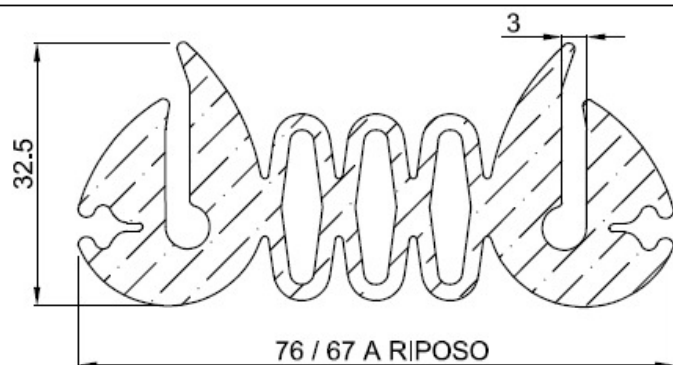
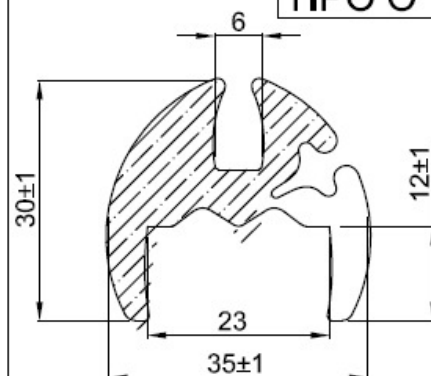





**2690**


**TIPO O**




**2651**




**993-4**

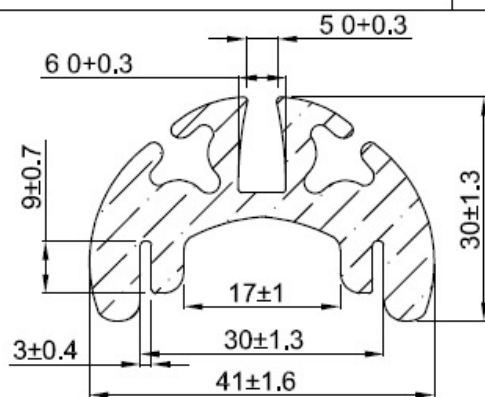


**2620**

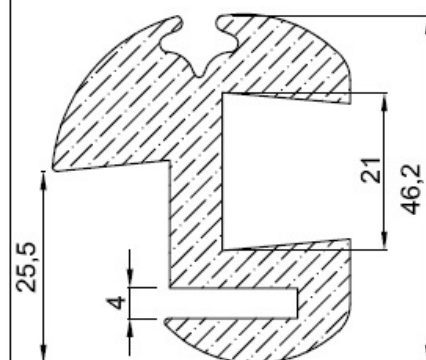


**2639**




**2600**

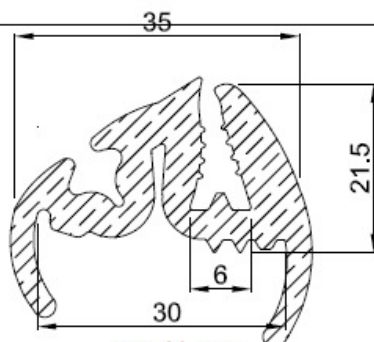


**2573**




**2390**



**2921**



**2236**



**2691**


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

| da mm<br>a | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
|------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| Classe     |            |            |            |            |             |              |              |              |              |               |
| E2         | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |


**TIPO O**




**2362**




**1880**




**1689**




**1560**




**1487**




**1553**




**1552**

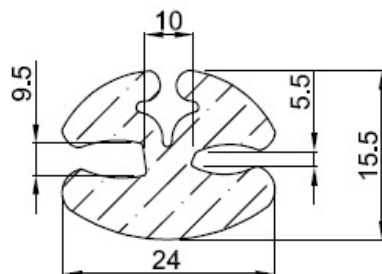


**1498**




**2708**

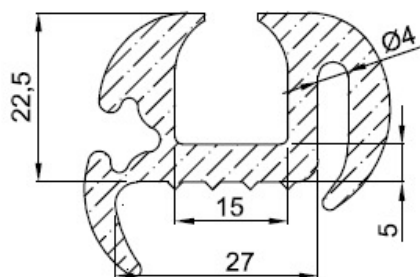

**2896**

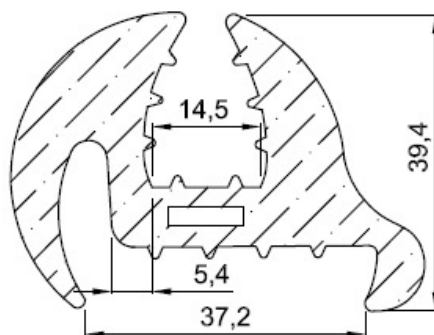












**2051**



**3055**



TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

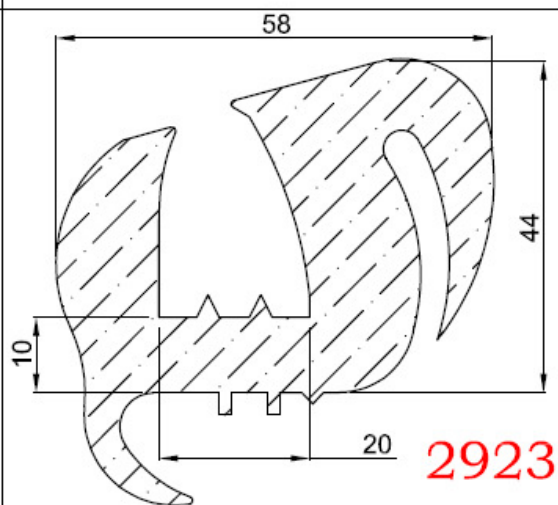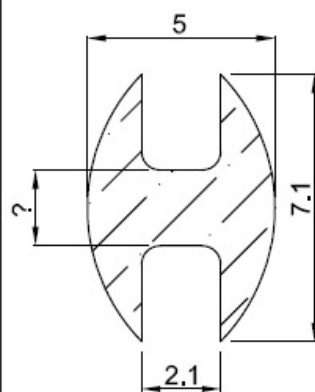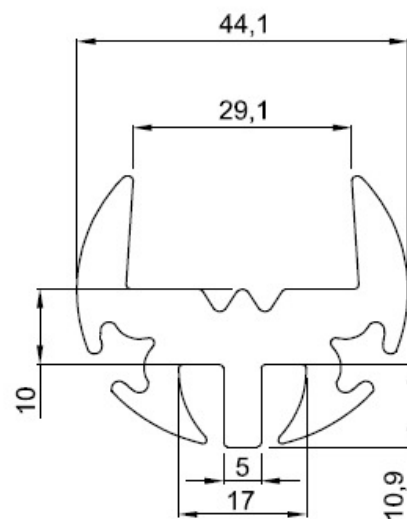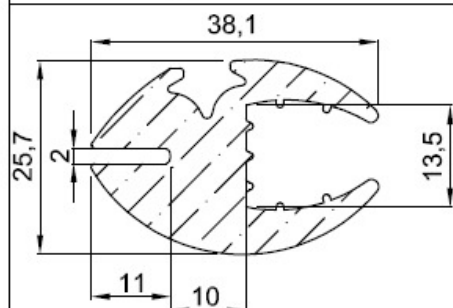



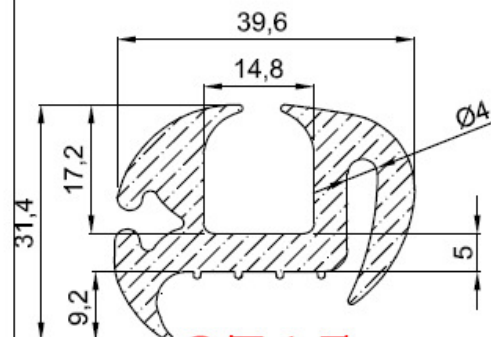

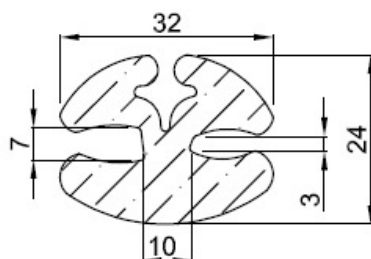
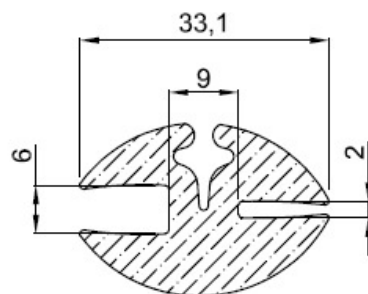
| da mm<br>a | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
|------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| Classe     |            |            |            |            |             |              |              |              |              |               |
| E2         | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |

**TIPO O**

**2923**

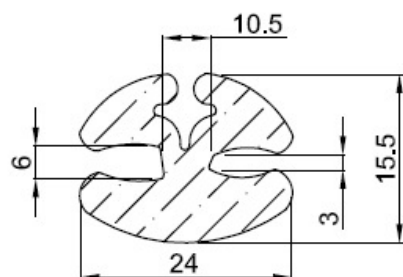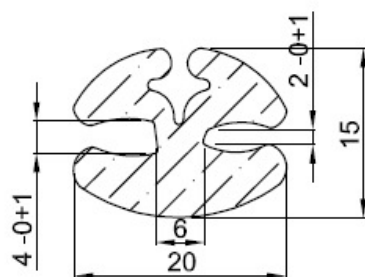**3019**

**3043**

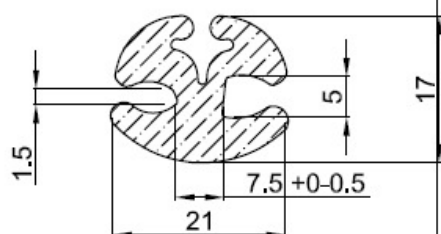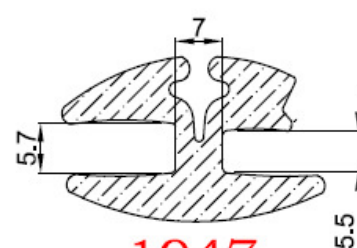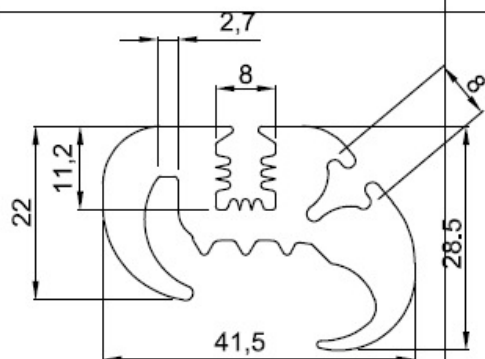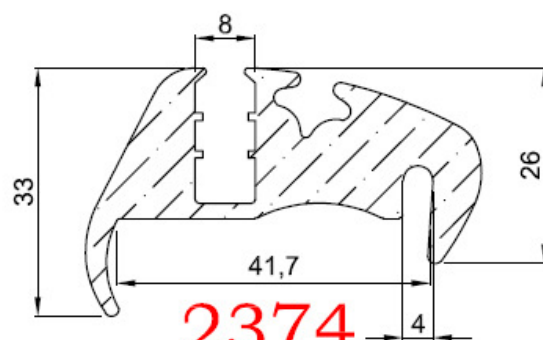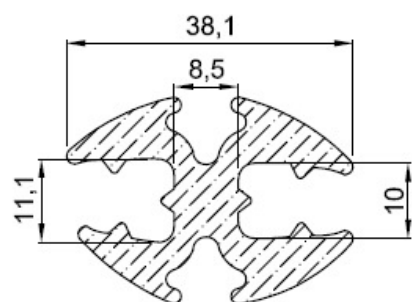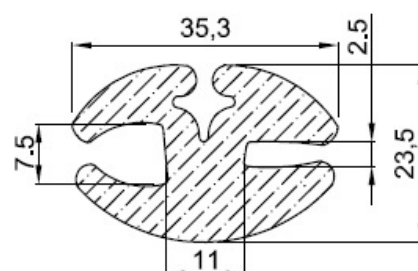**2855**

**2091**

**2836**

**2835**

**2715**

**2818**

**2708**

**1967**

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

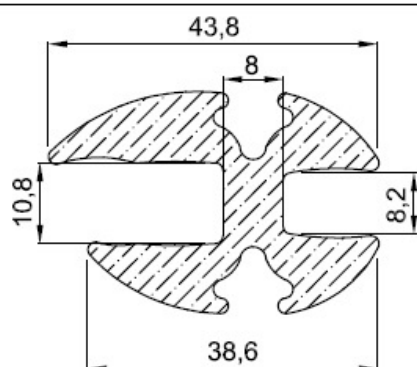
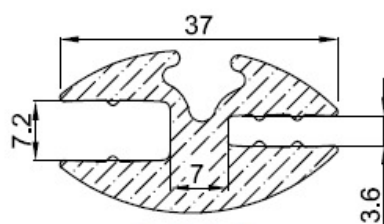
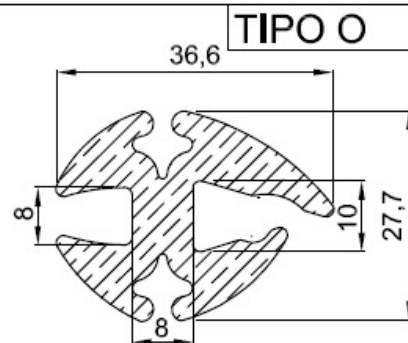
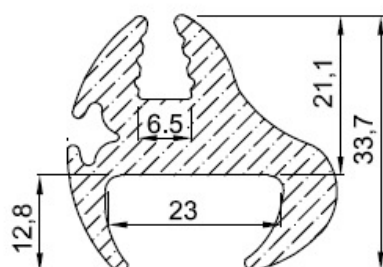

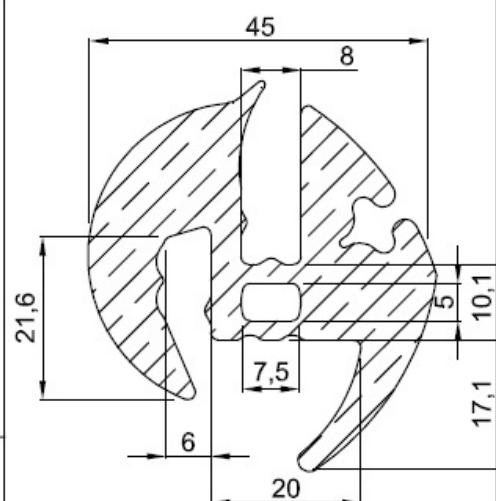

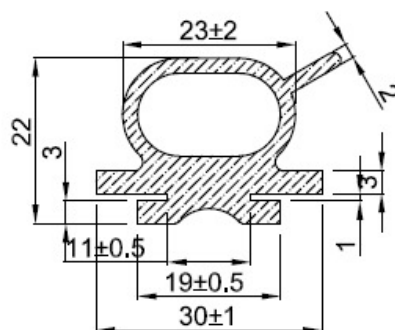


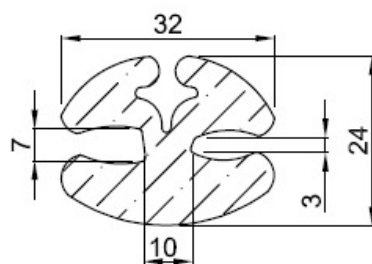
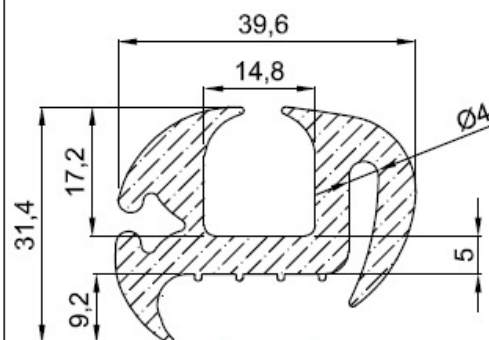
| da mm<br>a | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
|------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| Classe     |            |            |            |            |             |              |              |              |              |               |
| E2         | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |

**TIPO O**

**2698**

**2697**

**2696**

**2648**

**1235**

**1947**

**2687**

**2374**

**2087**

**2260**

**2166**

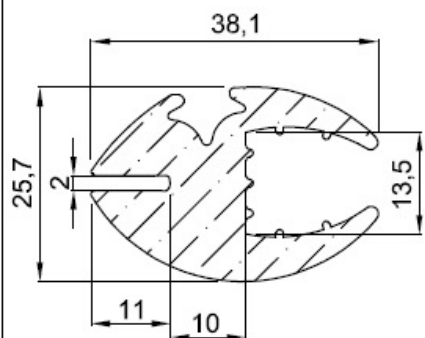
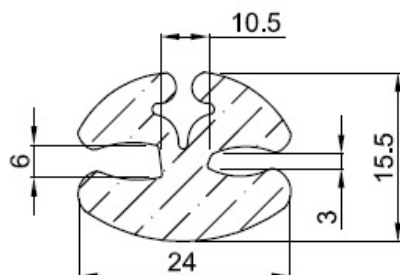
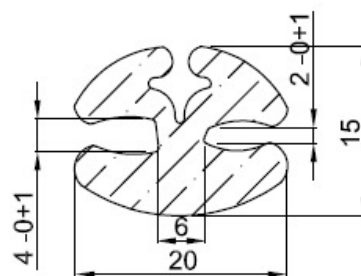
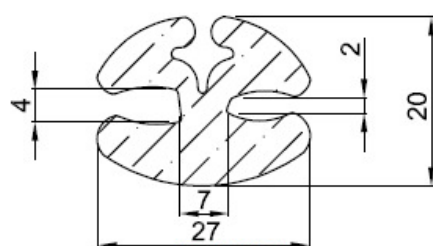
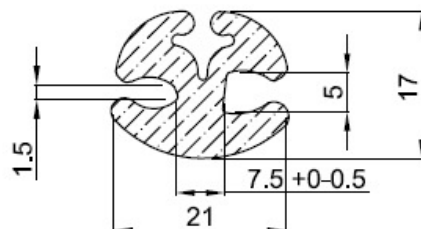

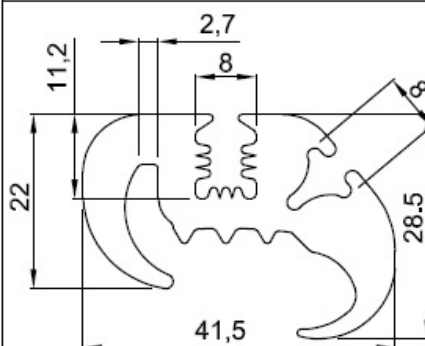
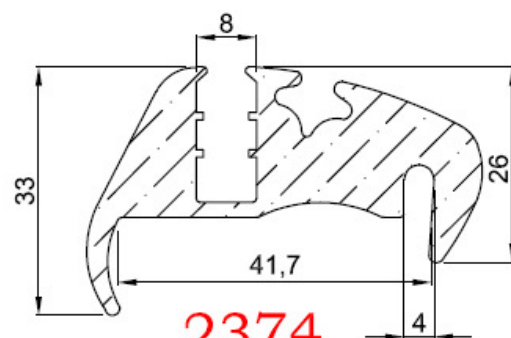
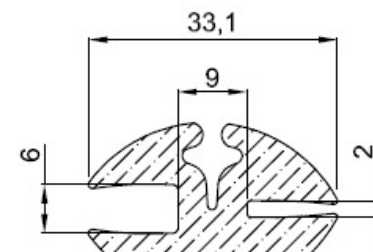
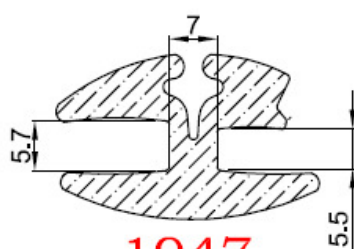
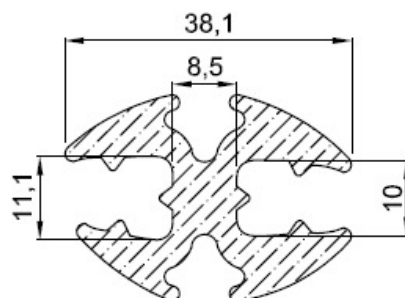
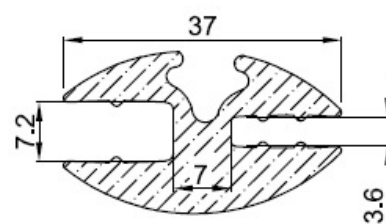
TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

| TOLLERANZE DIMENSIONALI DEI TRAPIATI IN GOMMA SECONDO UNI ISO 3302 |            |            |            |            |             |              |              |              |              |               |
|--------------------------------------------------------------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| da mm<br>a<br>Classe                                               | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
| E2                                                                 | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |














**2086**

**2098**

**2333**
**TIPO O**

**2219**

**2343**

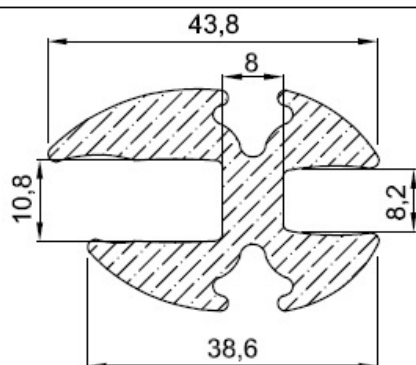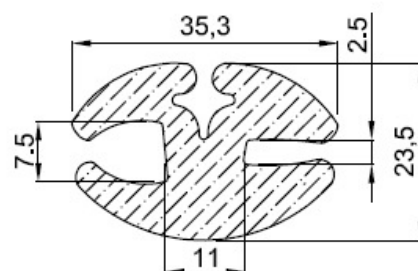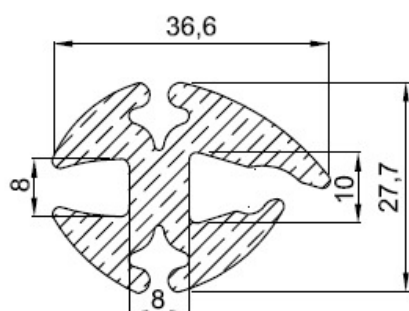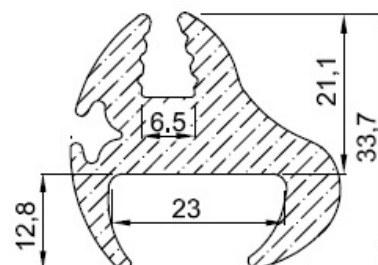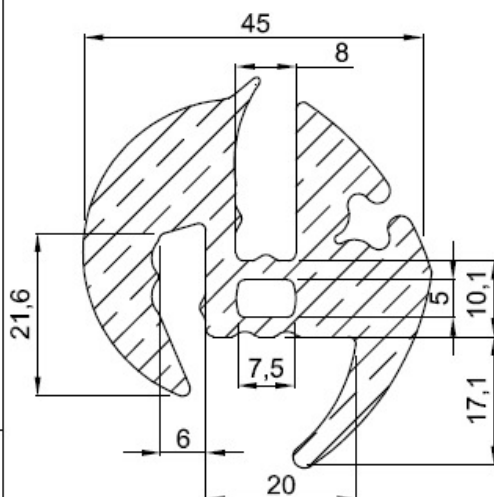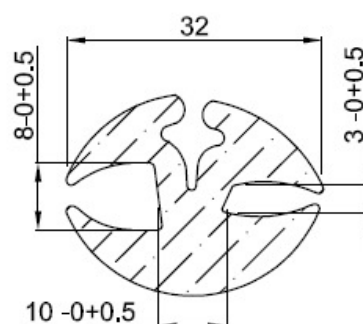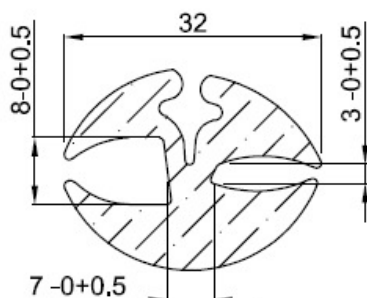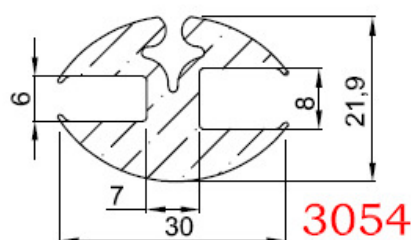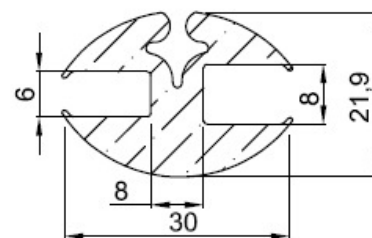**2338**

**2836**

**1130**

**2835**

**2818**

**2708**

**2715**

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

| da mm<br>Classe | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
|-----------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| E2              | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |

**TIPO O**

**2855**

**2698**

**2697**

**2696**

**2648**

**1235**

**2687**

**2374**

**1967**

**1947**

**2087**

**2098**
**TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302**

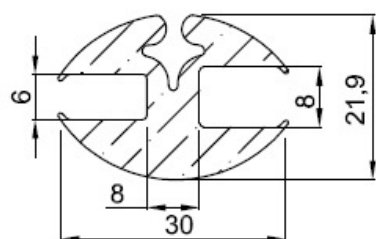
| TOLLERANZE DIMENSIONALI DEI TRAPIERTI IN COPPIA SECONDO UNI ISO 3502 |            |            |            |            |             |              |              |              |              |               |
|----------------------------------------------------------------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| da mm<br>a<br>Classe                                                 | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
| E2                                                                   | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |

**TIPO O**

**2086**

**2091**

**2166**

**2333**

**2260**

**2219**

**2343**

**2338**

**1275**

**3082**

**3054**

**3041**

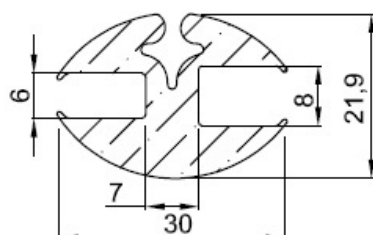
TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

| da mm  | 0,0   | 1,6   | 2,6   | 4,1   | 6,4   | 10,1  | 16,1  | 25,1  | 40,1  | 63,1  |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Classe | 1,5   | 2,5   | 4,0   | 6,3   | 10,0  | 16,0  | 25,0  | 40,0  | 63,0  | 100,0 |
| E2     | ±0,25 | ±0,35 | ±0,40 | ±0,50 | ±0,70 | ±0,80 | ±1,00 | ±1,30 | ±1,60 | ±2,00 |


TIPO O




3041




3054




3055

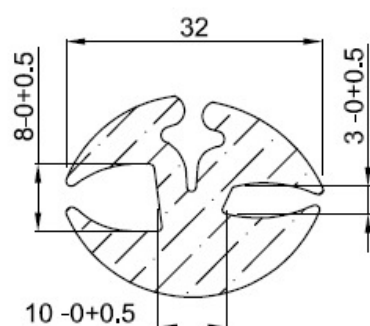


1275

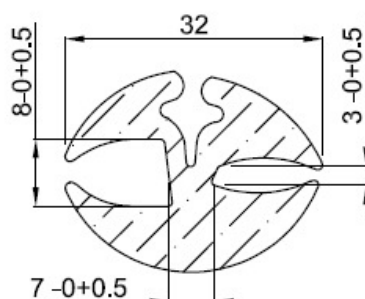


3082




3088



3107

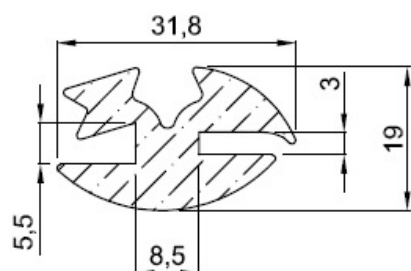

3110

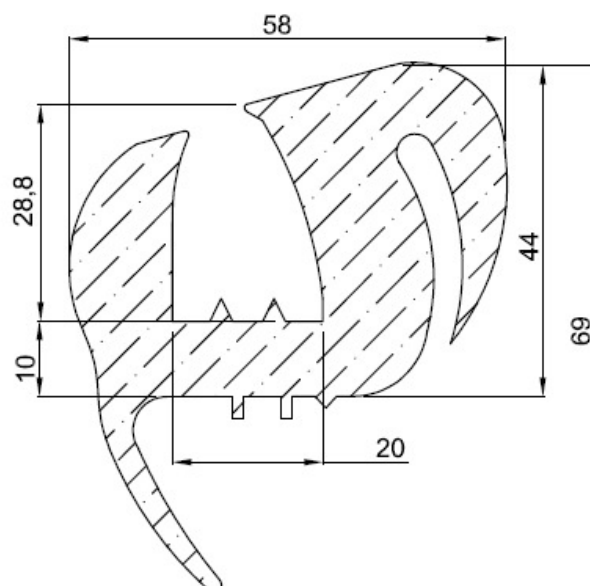


3093


## TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302
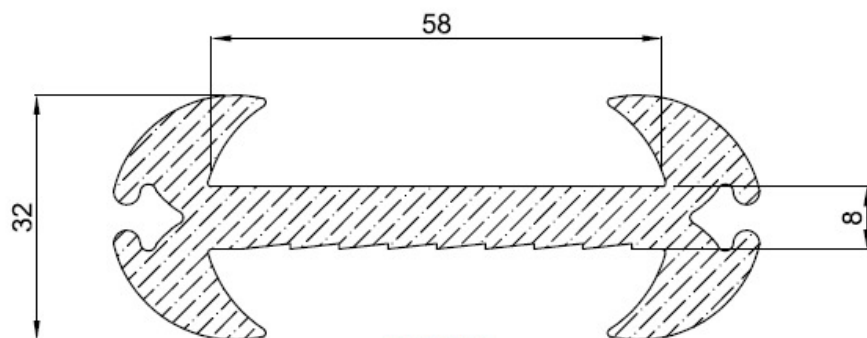
| da mm<br>a<br>Classe | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
|----------------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| E2                   | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |


TIPO O




3152




3174

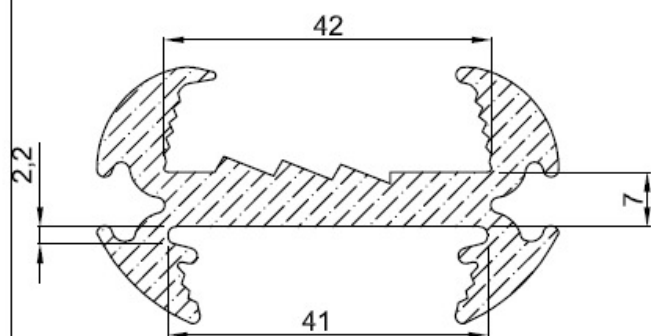


3153

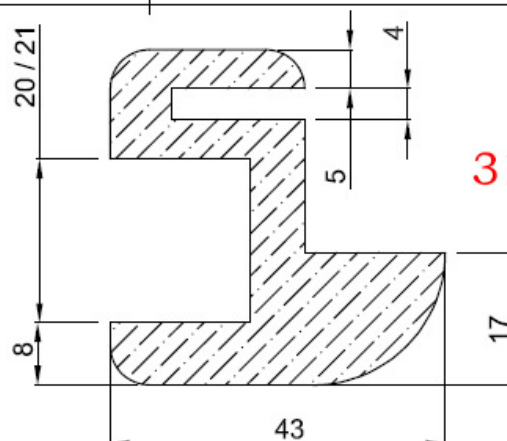

3161

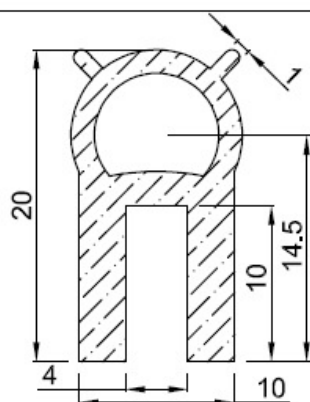

3175

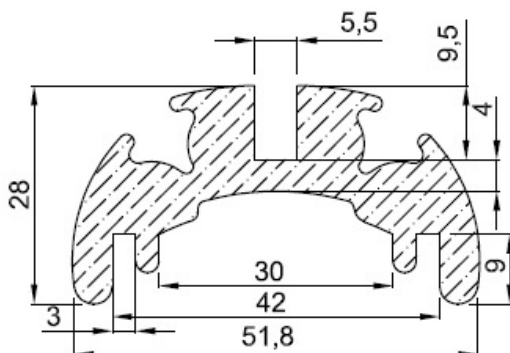

3193

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

| TOLLERANZE DIMENSIONALI DEI MATERIALI IN CONFORMITÀ CON ISO 3302 |            |            |            |            |             |              |              |              |              |               |
|------------------------------------------------------------------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|---------------|
| da mm<br>a<br>Classe                                             | 0,0<br>1,5 | 1,6<br>2,5 | 2,6<br>4,0 | 4,1<br>6,3 | 6,4<br>10,0 | 10,1<br>16,0 | 16,1<br>25,0 | 25,1<br>40,0 | 40,1<br>63,0 | 63,1<br>100,0 |
| E2                                                               | ±0,25      | ±0,35      | ±0,40      | ±0,50      | ±0,70       | ±0,80        | ±1,00        | ±1,30        | ±1,60        | ±2,00         |