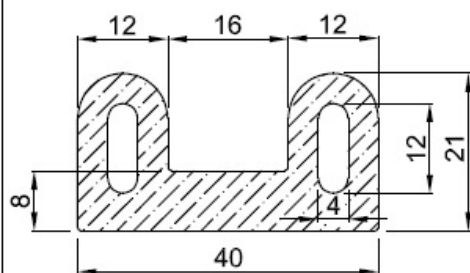







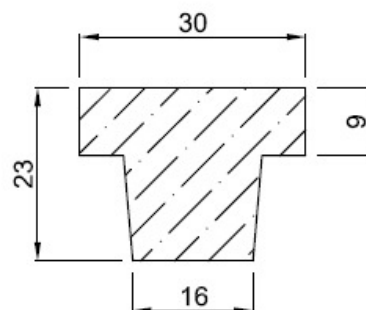


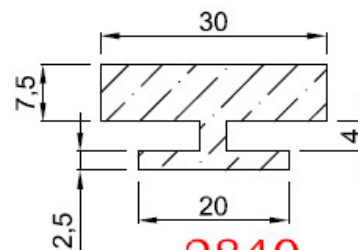



TIPO GEN.

2735

2832

2867

2463

2843

2778

2779

2733

2777

2874

2206

2840


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

TOLLERANZE DIMENSIONALI DEI TRAPIERTI IN COPPIA SECONDO UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.




3027




3089




1116B

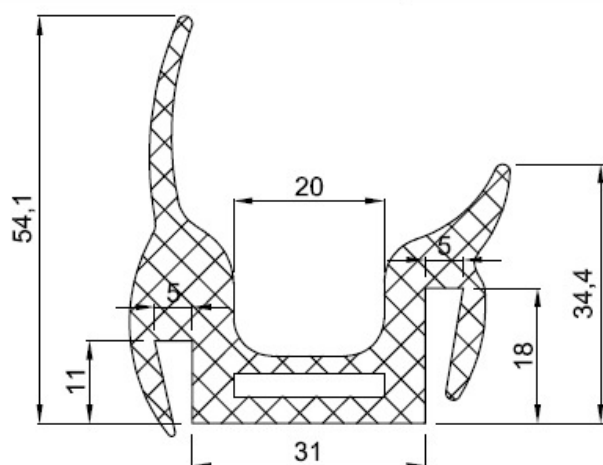


3083




1738




2645

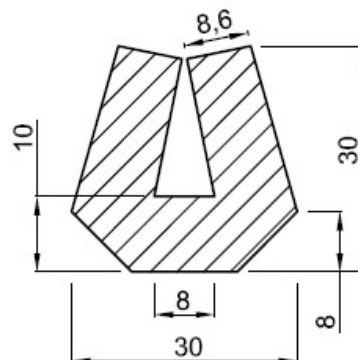


2736




1986




2358



2824












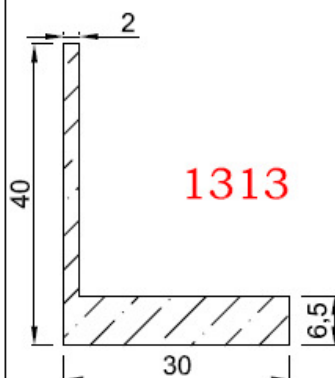


1313









TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302







da mm a		Tolleranze dimensionali in micrometri in corrispondenza dei secondi UNI ISO 3302									
		0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe		1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2		±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

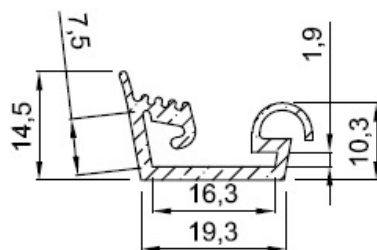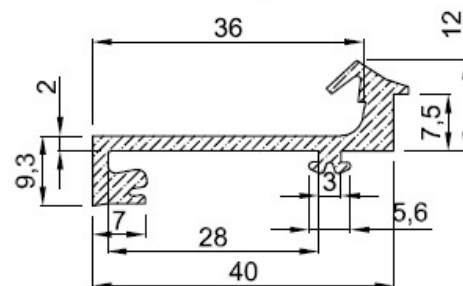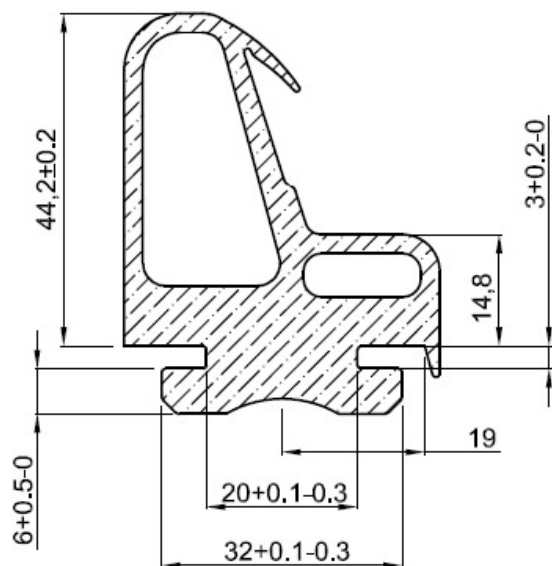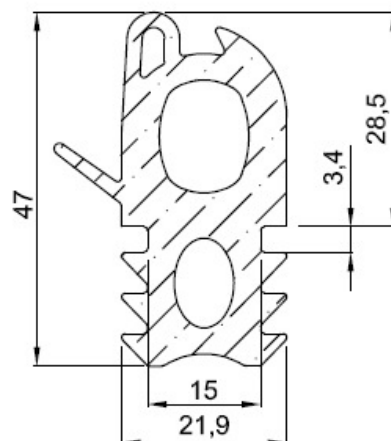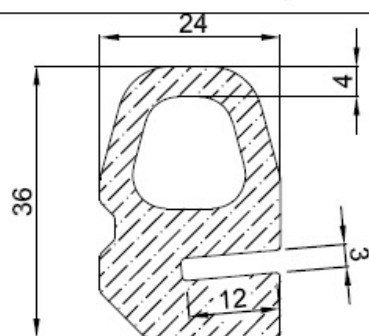TIPO GEN.

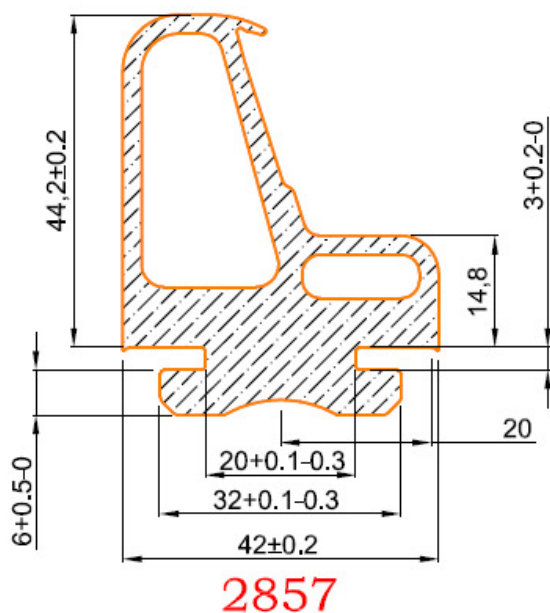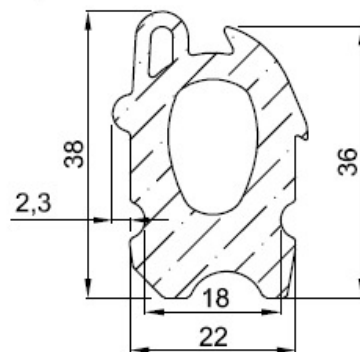2854

2853

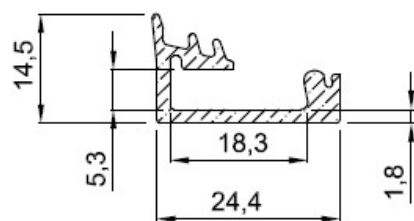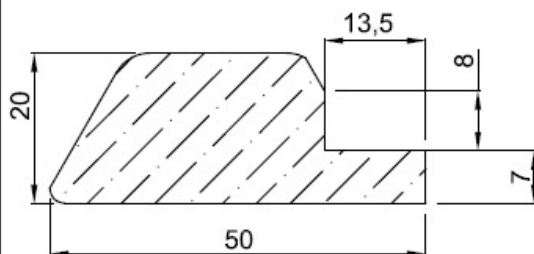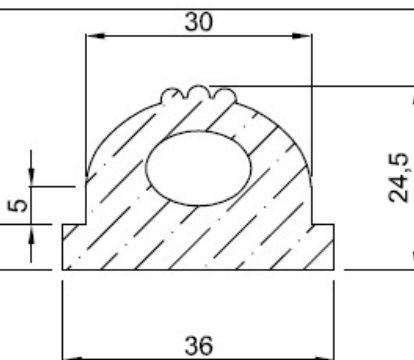2852

2856

2842

2585

2856

2845

2810

2820

2848

2807
TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

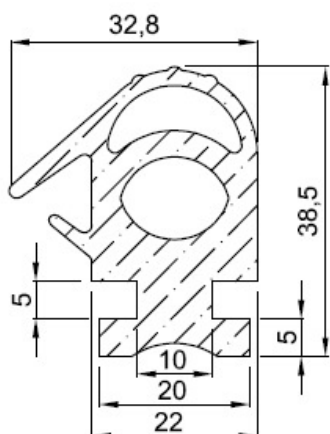
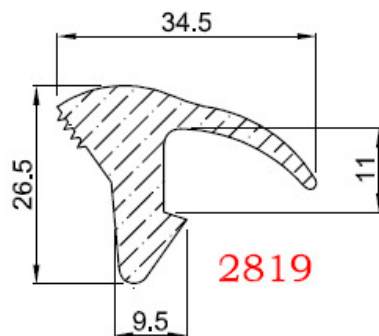

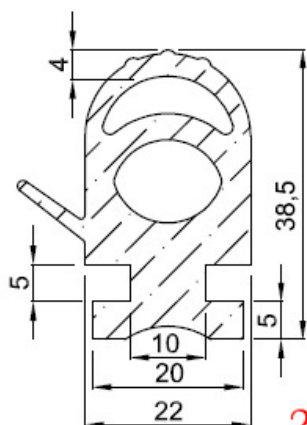
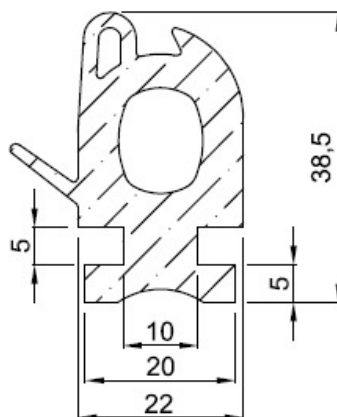
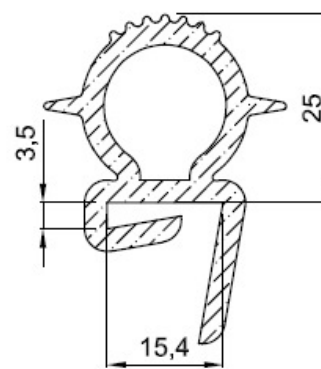


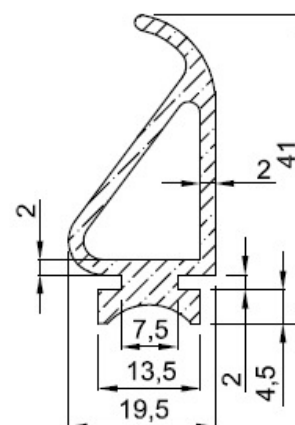



TIPO GEN.

2857

2859

2858

2827

2862


2808


2851

2805

2813

2812

2811

2814

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm a	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

TIPO GEN.

2821

2819

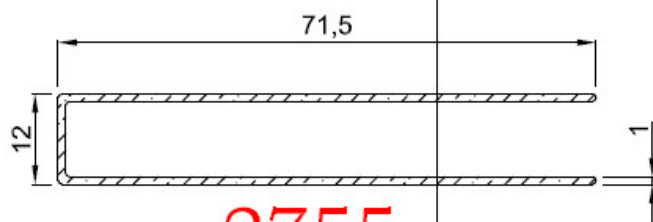2815

2822

2823

2825

2751

2780

2794

2732

2773

2719


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

TOLLERANZE DIMENSIONALI DEI TRATTEATI IN GOMMA SECONDO UNI ISO 3302											
da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0	
Classe	E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.




2755




2785

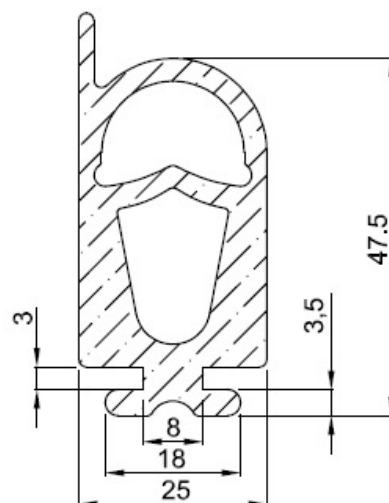


2790

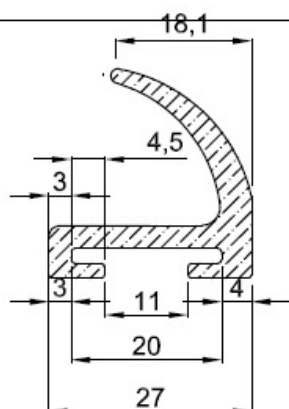


2793

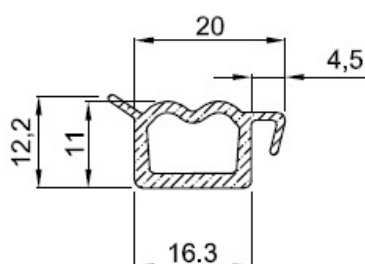


2792




2791




2799




2796

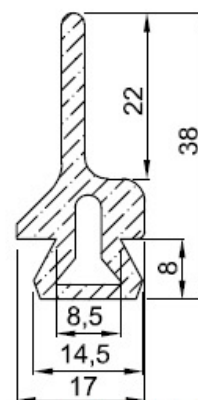


2795



2767

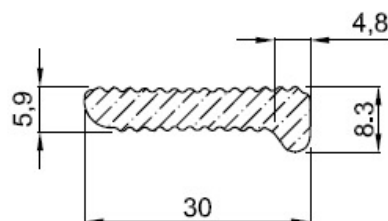













2800



2801


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

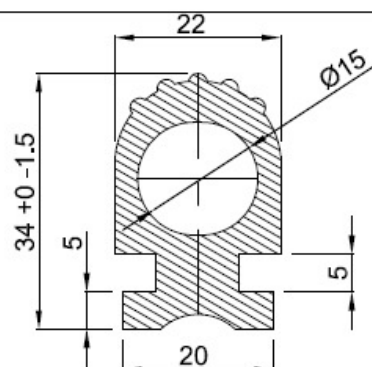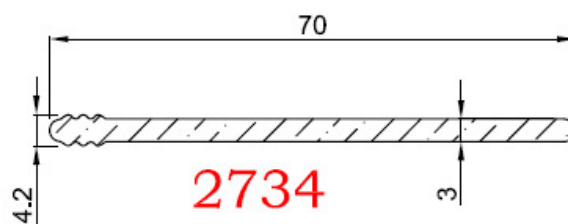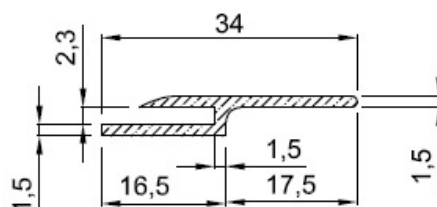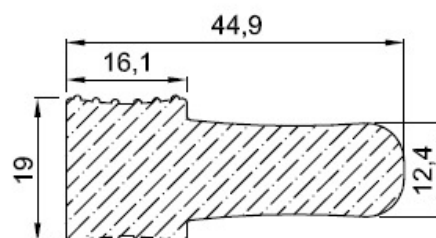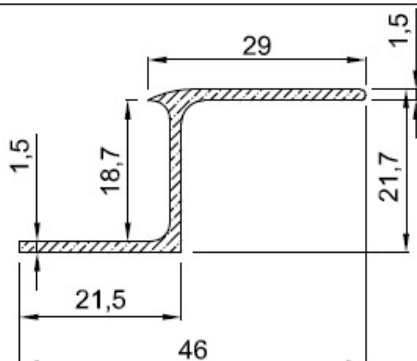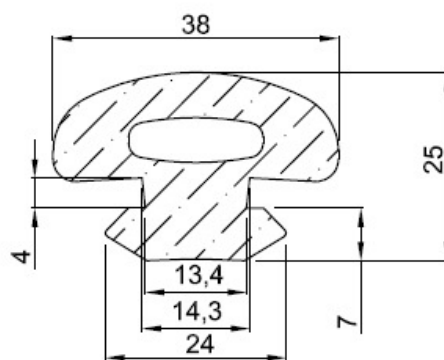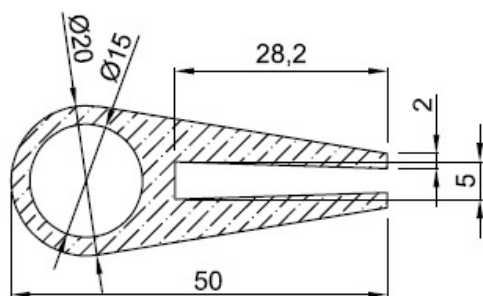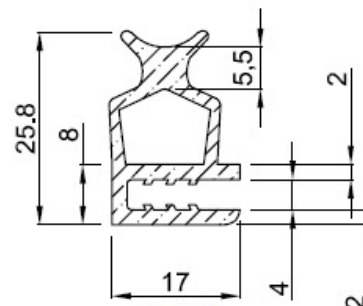

2804

2734
TIPO GEN.

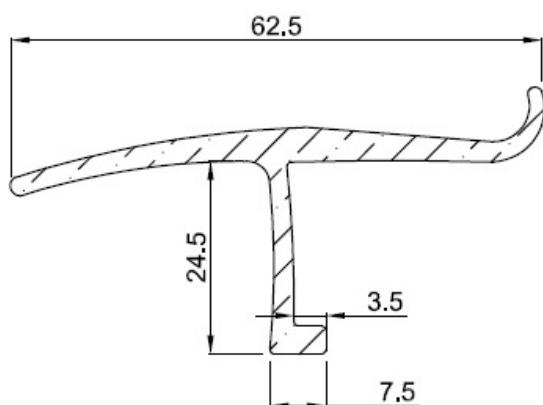2759

2781

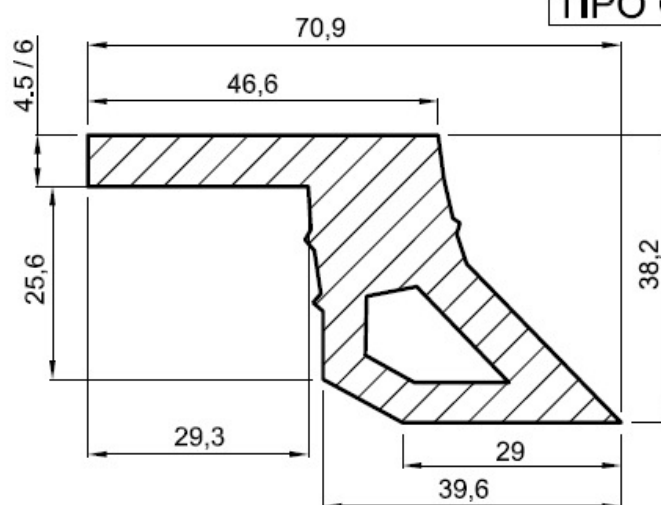2782

2788

2783

2743

2741

2764

2769

2766

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00




2789



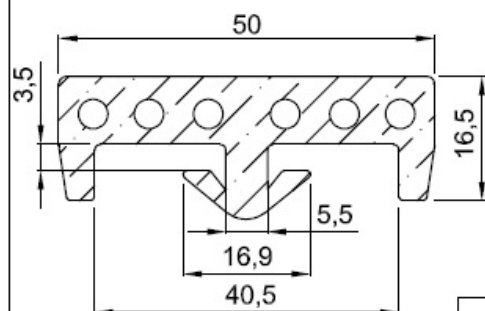
TIPO GEN.



2742

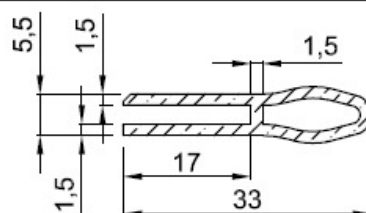


2710




2784


2695




2682




2763

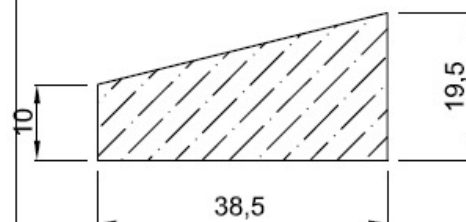


2765



2772














2709



2771

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

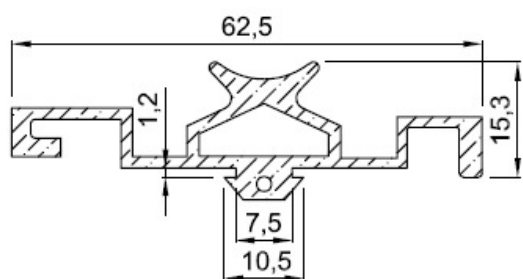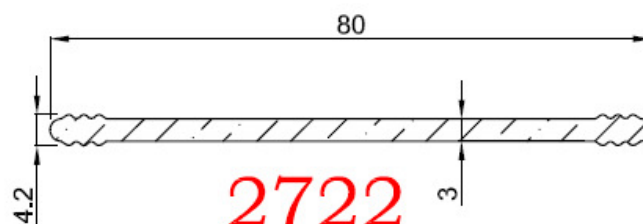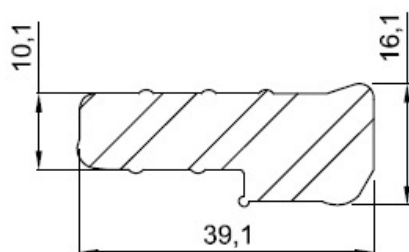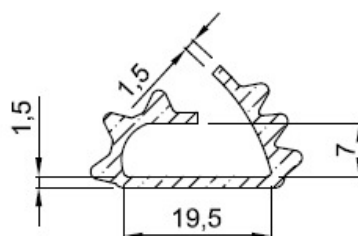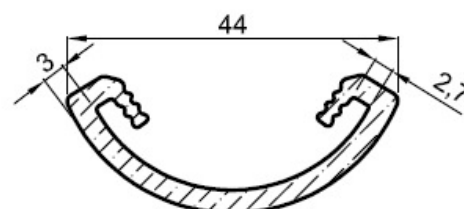TIPO GEN.

2768

2722

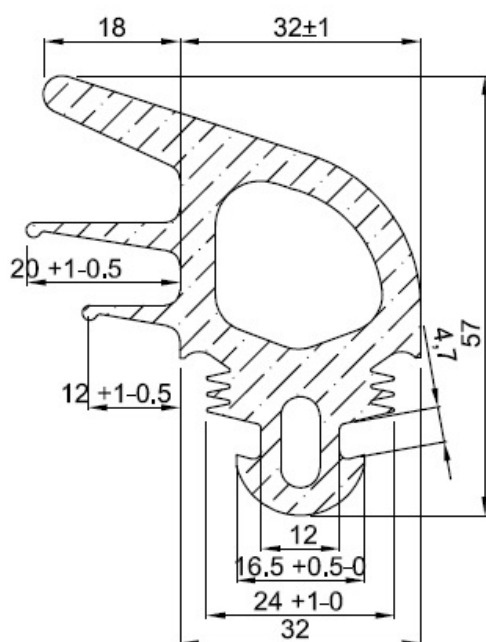2680

2684

2694

2692

2173

2714

2725

2723

2728


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.



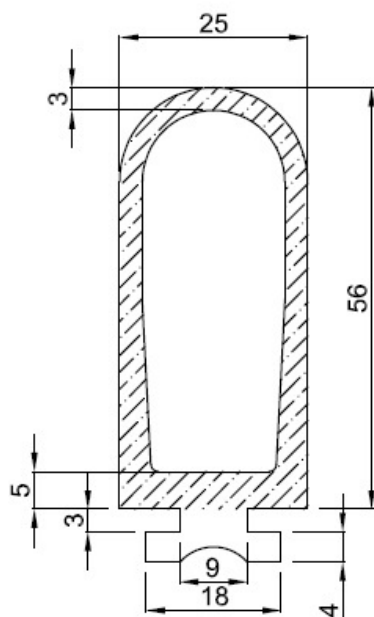
2675




2671




2662




2660

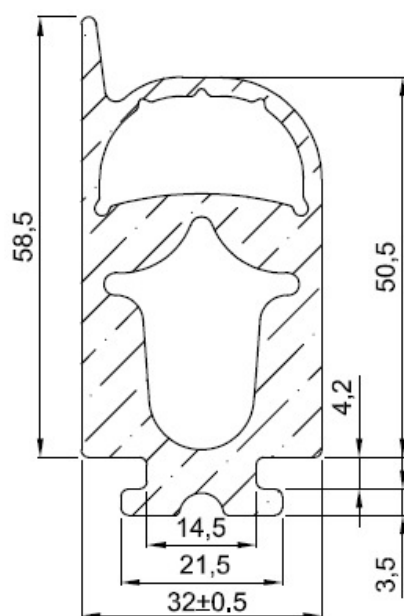


2683




2665



2664




2679




2631

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

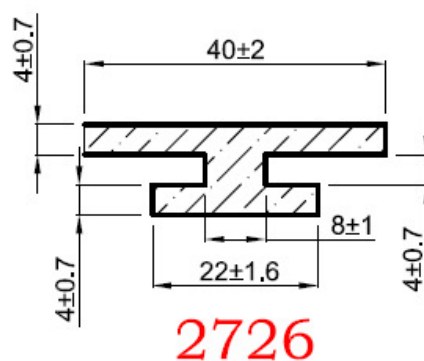


2726

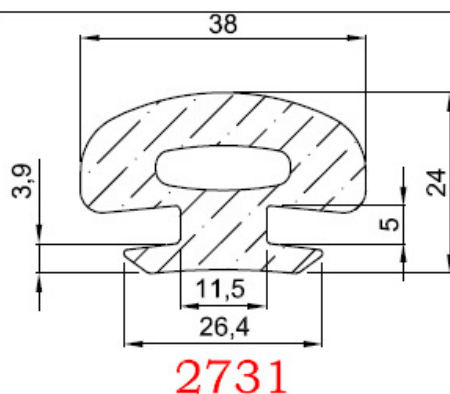


2731

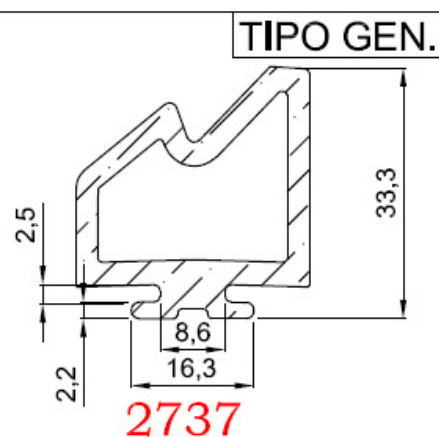


2737

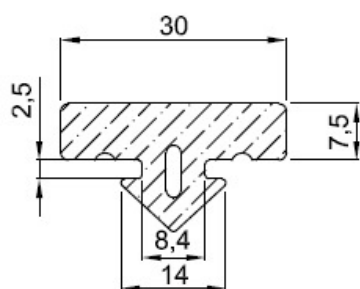


2739

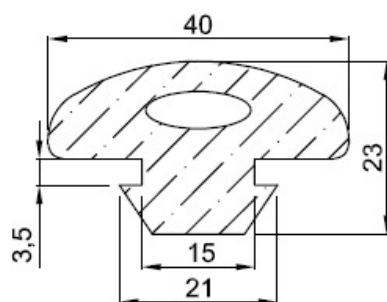


2740




2634




1126

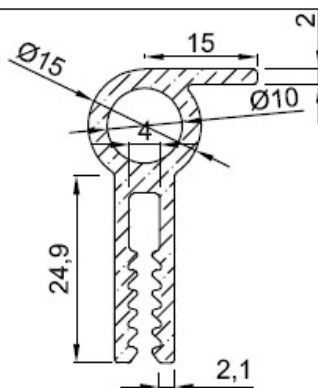


2640

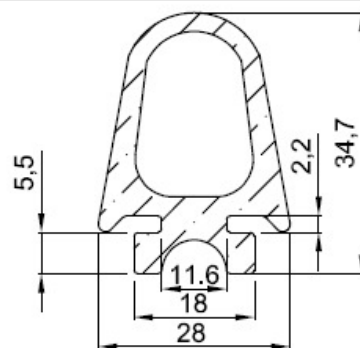


2633



2645

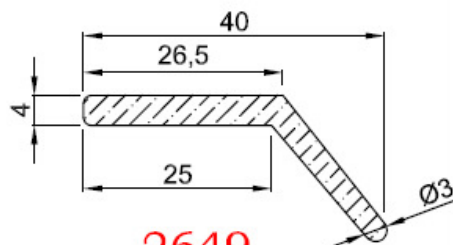












2649



2650













TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

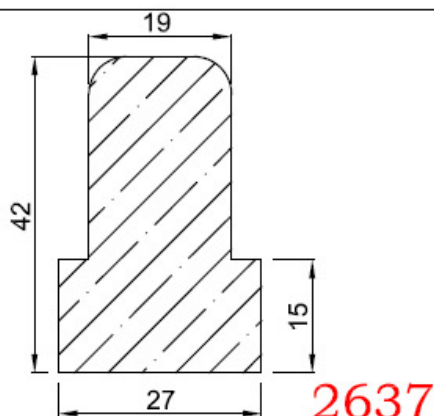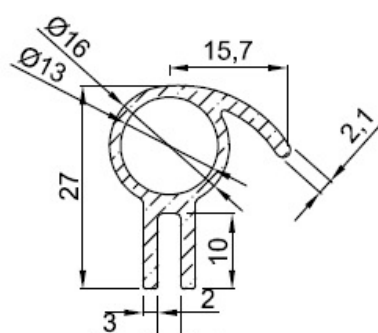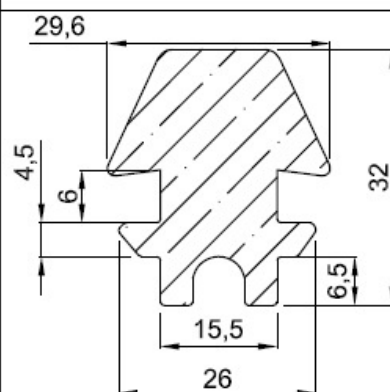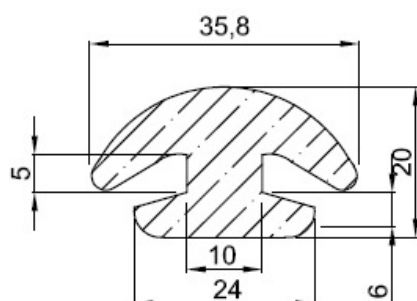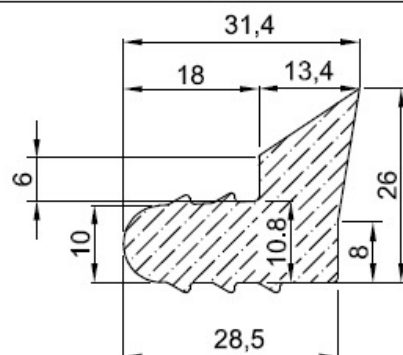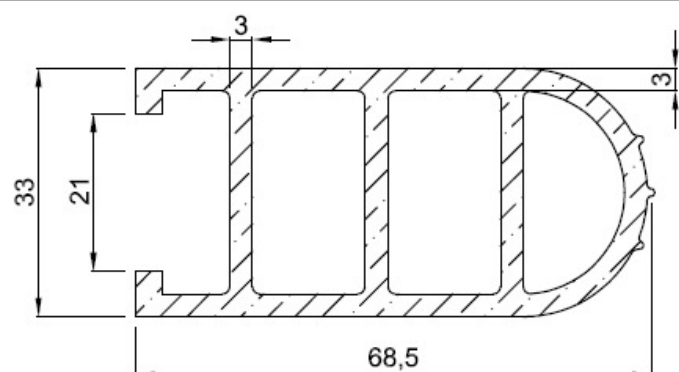TIPO GEN.

2636

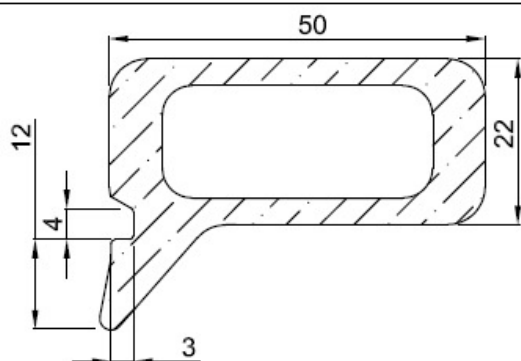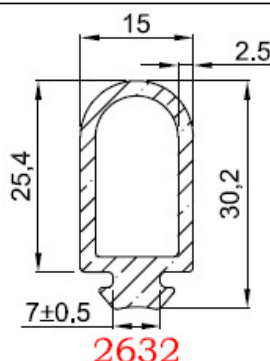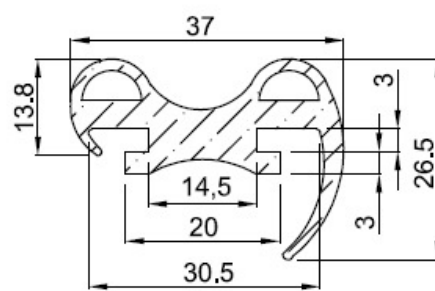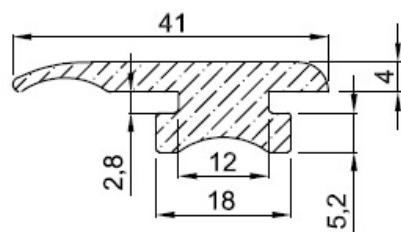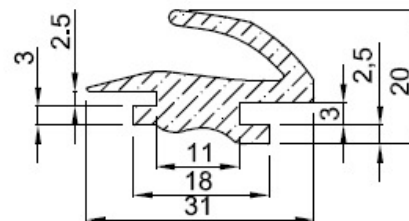2637

2635

2642

2641

2647

2652

1577

2659

2674

2591











TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

TIPO GEN.

2663

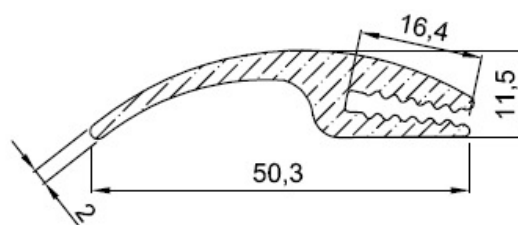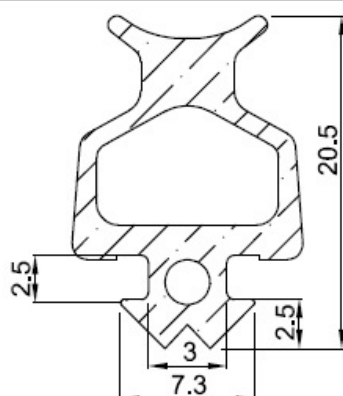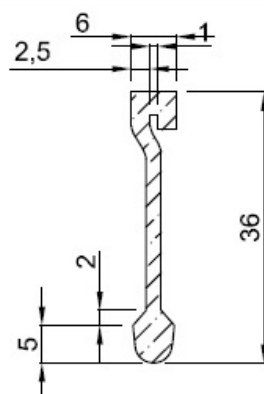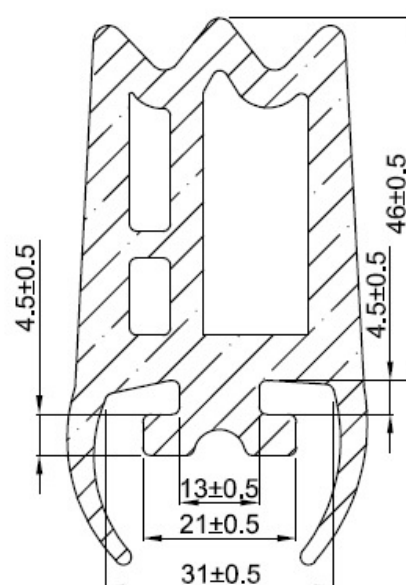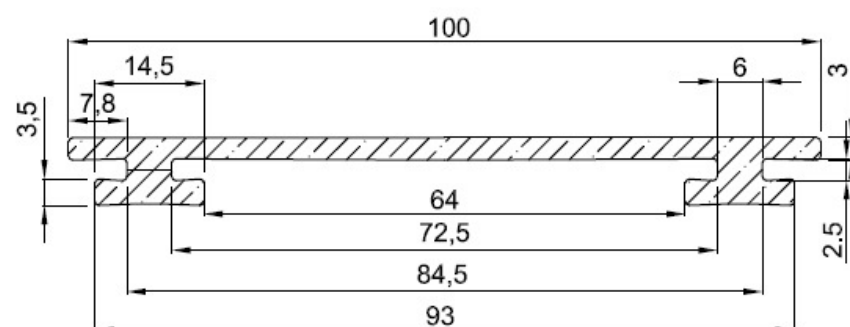2632

2630

2628

2339

698

2594

2597

2593

2601

2602

999


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
Classe	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.

1566

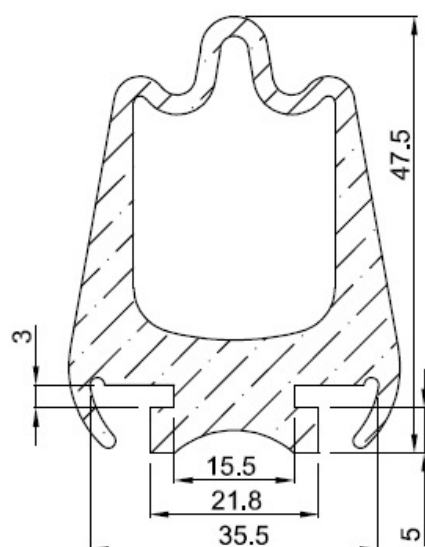1902/2810

2622

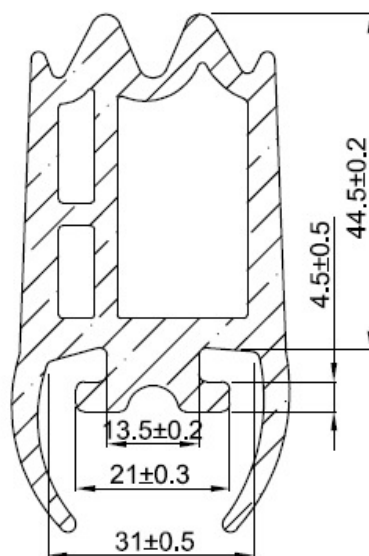1568

2279

2075

2629

2474

2468

2571

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


TOLLERANZE DIMENSIONALI DEI TRATTEATI IN GOMMA SECONDO UNI ISO 3302											
da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0	
Classe	E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00



668




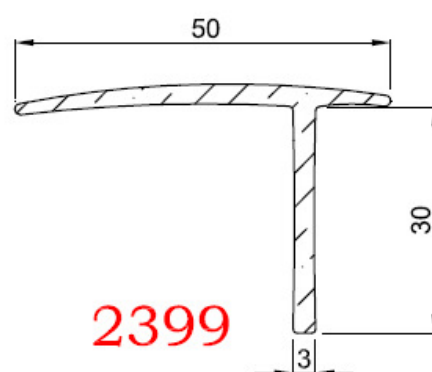2654




2399


TIPO GEN.




2452

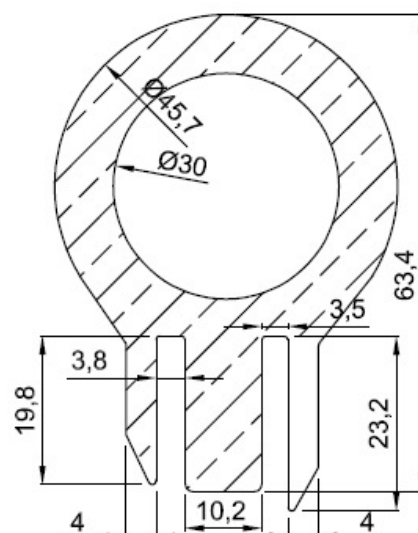


2466




2459

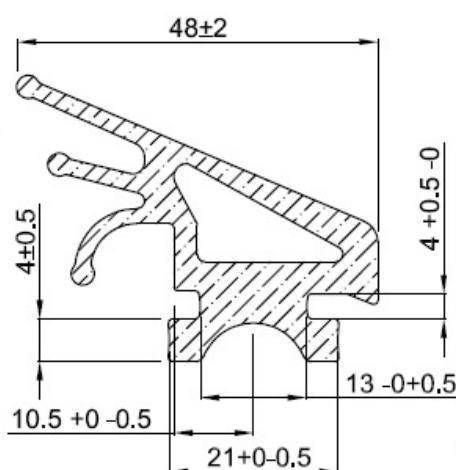


1750

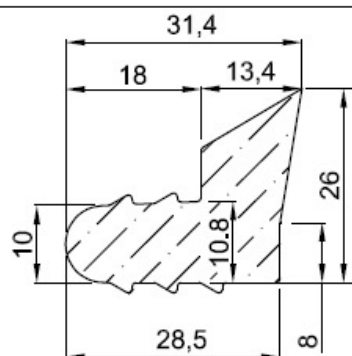

2604

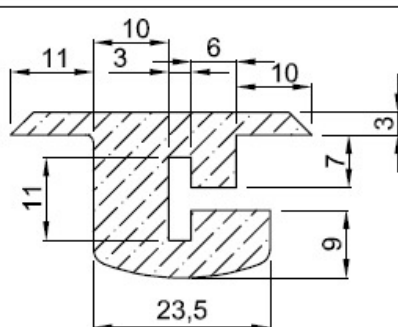

2603

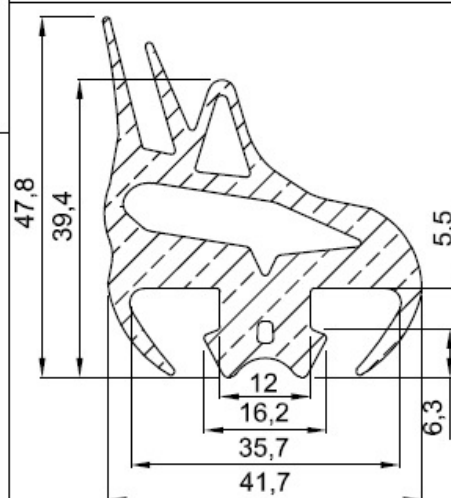


2473


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

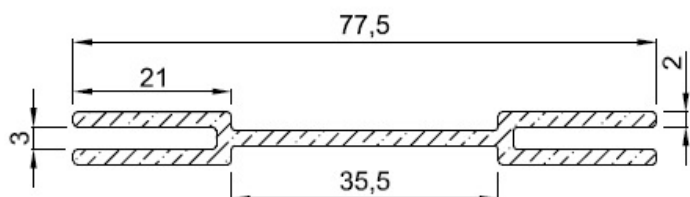
TIPO GEN.




2467

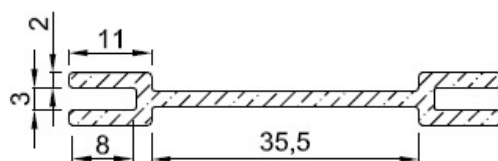


2457

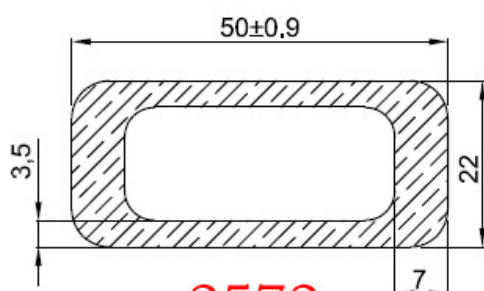


2572




2393

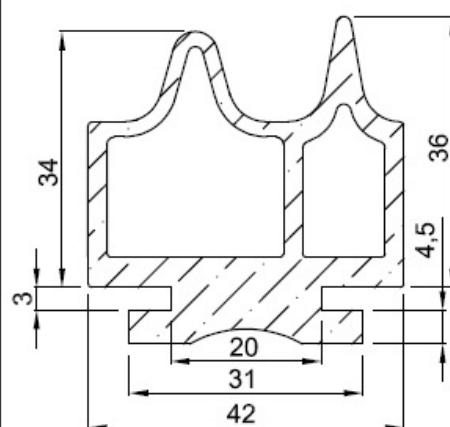


2580

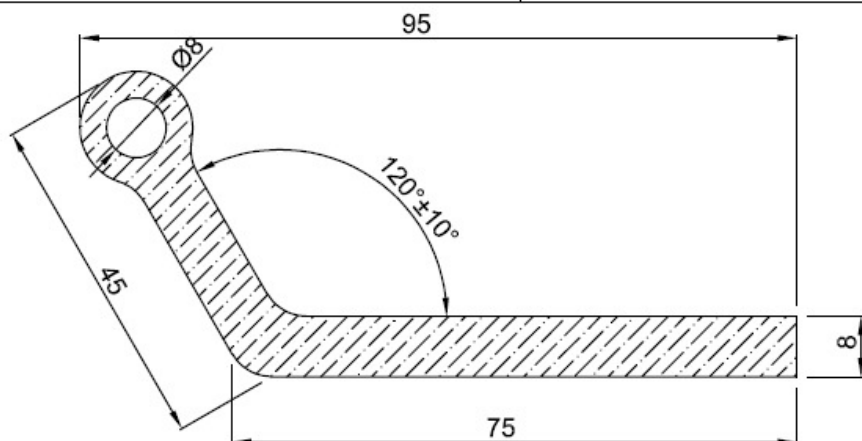


2577




2389



2392



2380




2346


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

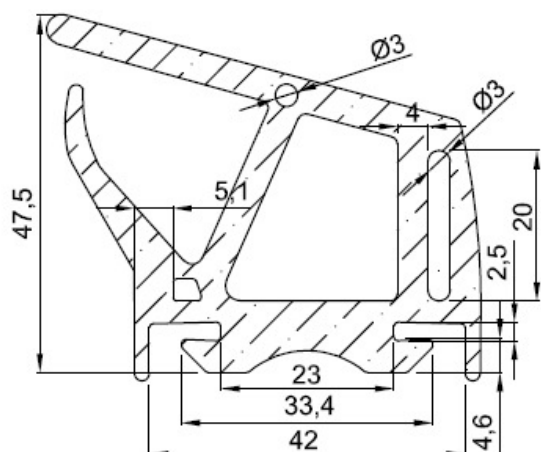
TIPO GEN.




2582




2372




2348

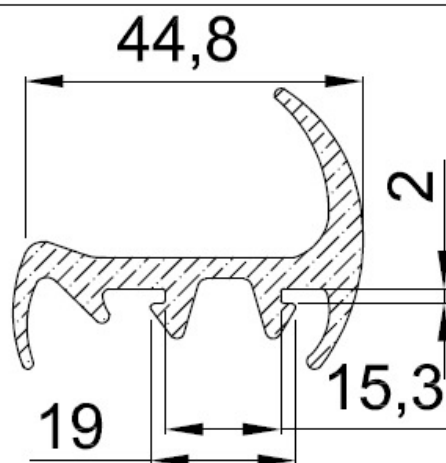


2578




2386




2388




2353

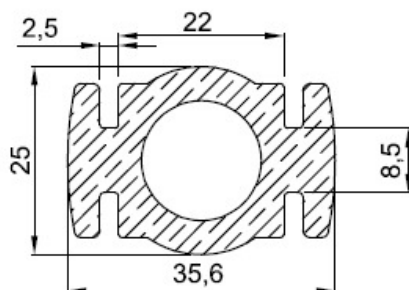


2351




2345



2368




2365




2316

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

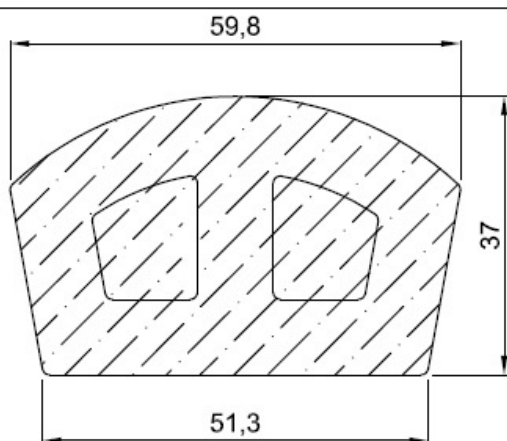


2570




2376

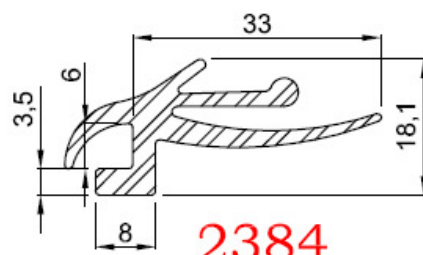
TIPO GEN.




2384

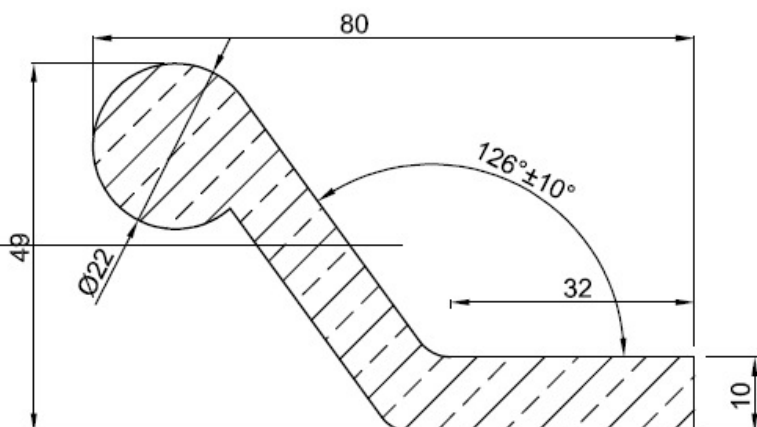


2574




2396



2395

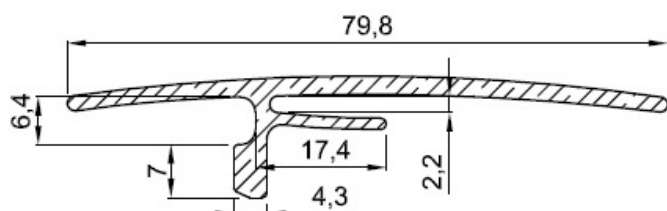












2364



2319


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

Tolleranze dimensionali dei filetti in cava secondo UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

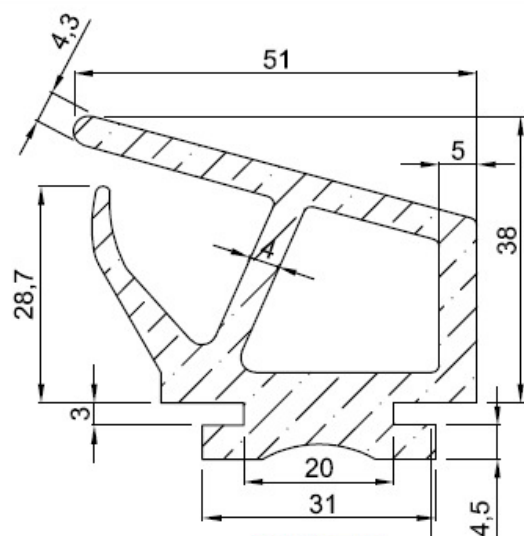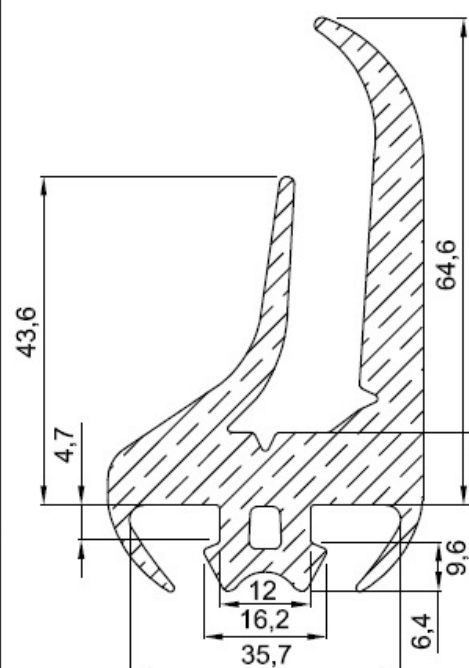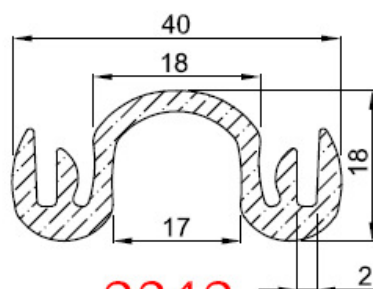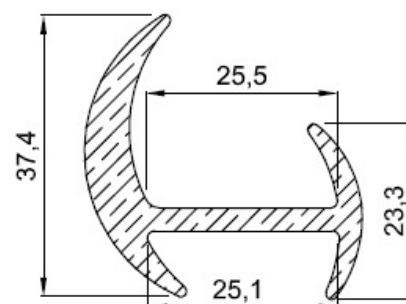
TIPO GEN.

2579

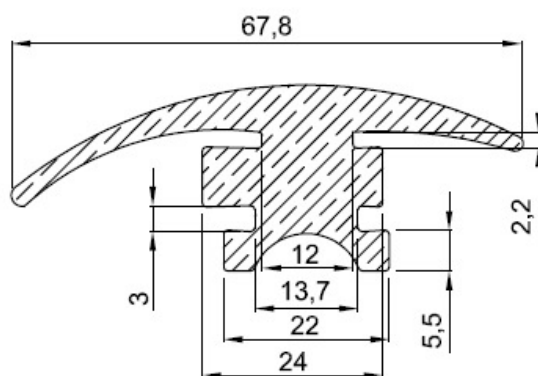2324

2472

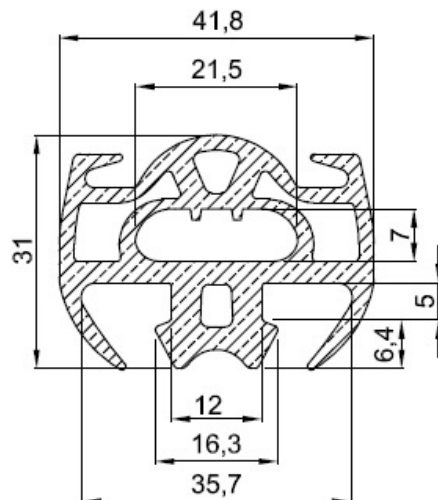2383

2355

2321

2322

2334

2344

2342

2347

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00




2377




2471


TIPO GEN.




2249

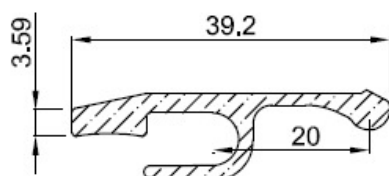


2312




2315




2320

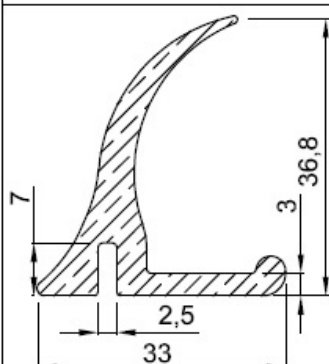


2385

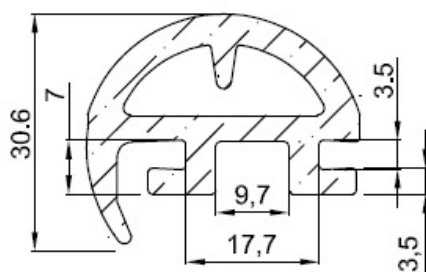


2360

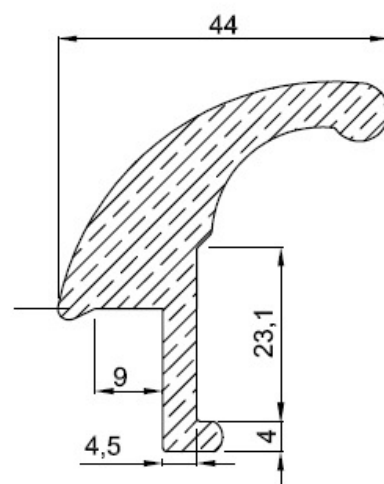

2340

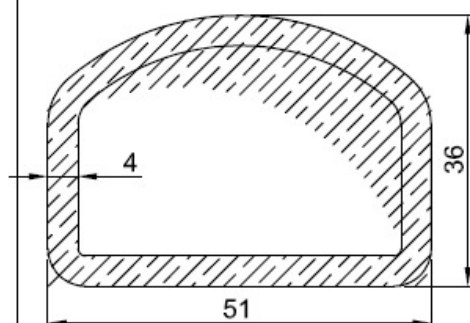

2329

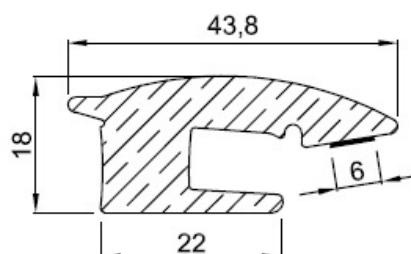


2250


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

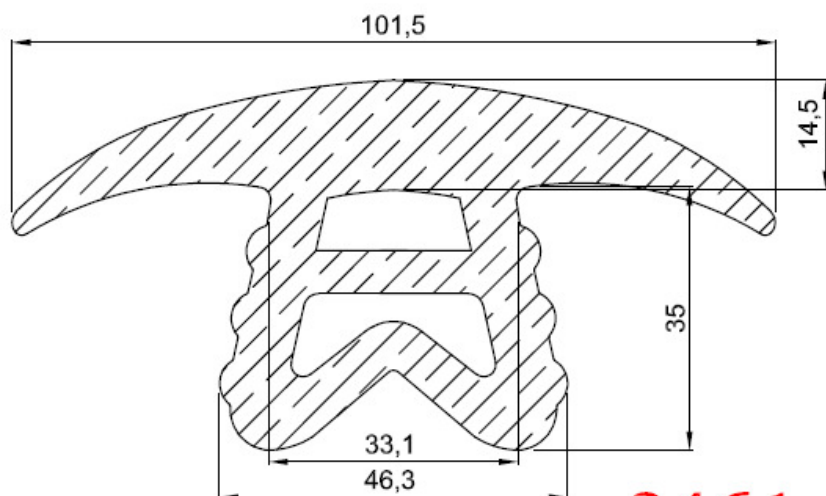
TIPO GEN.




2461

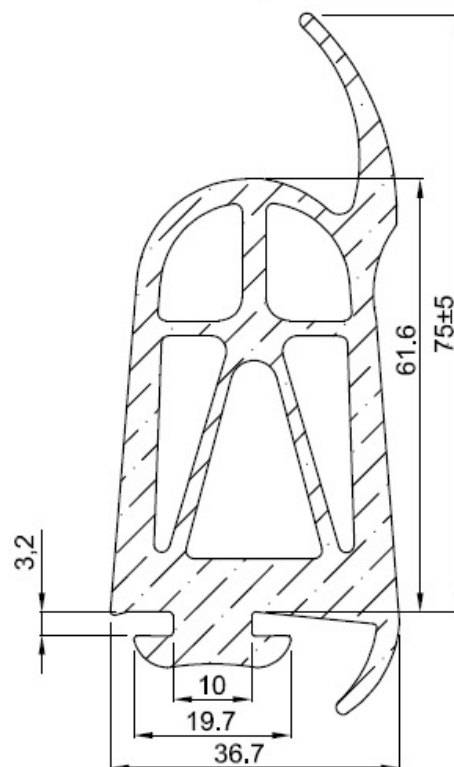


2451

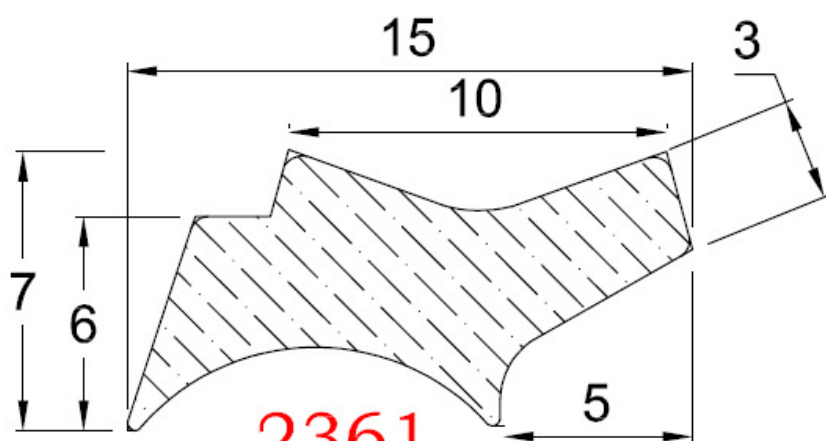


2361




2306



2305













2307

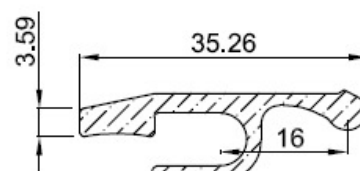

2311

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302









da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

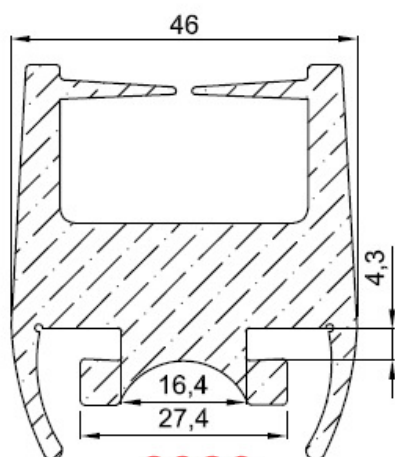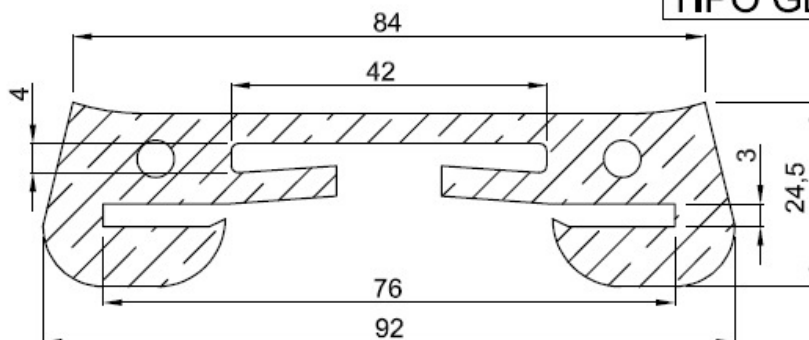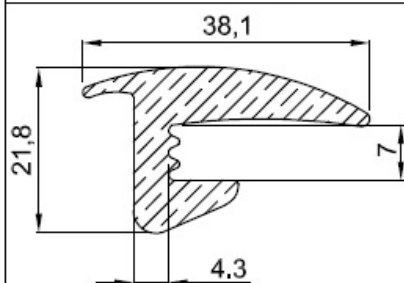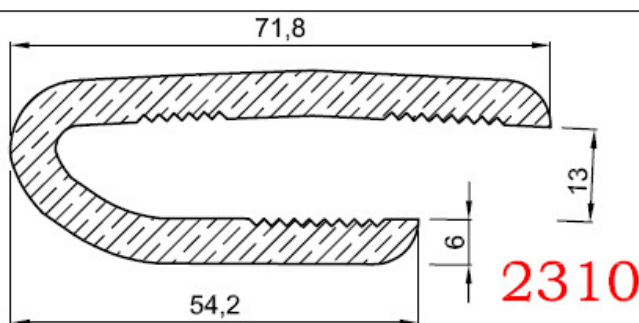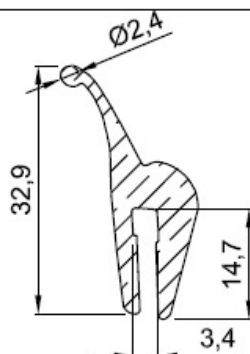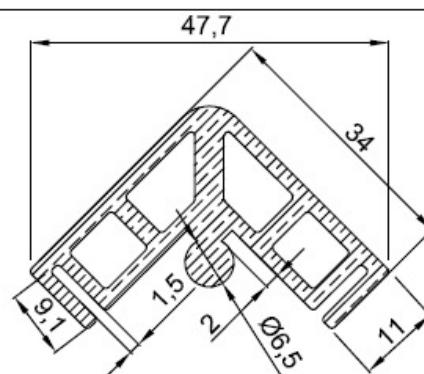TIPO GEN.

2328

2350

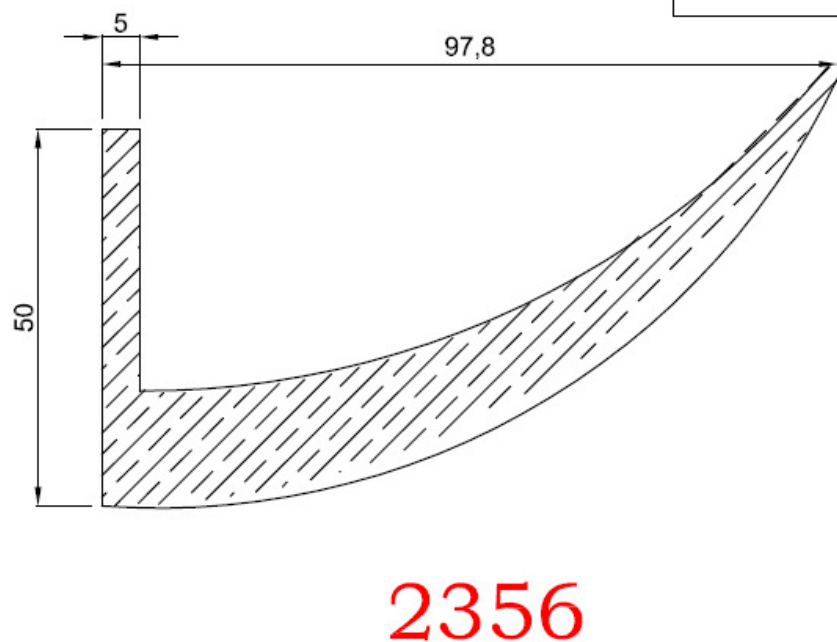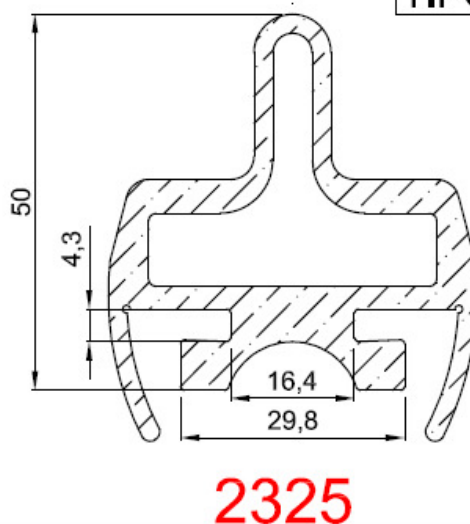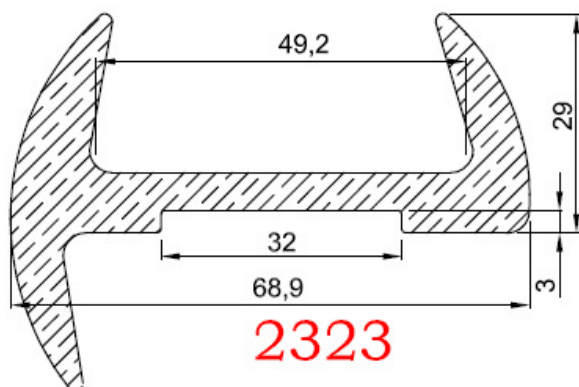2339

2310

2225

2224

2227

2232

2231

2228

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.




TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

Tolleranze dimensionali dei fori in cassa secondo UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.




2244




2242




2237




2245

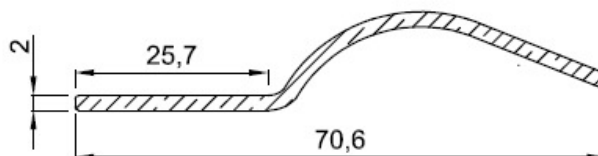


2245




2158




2215




2214

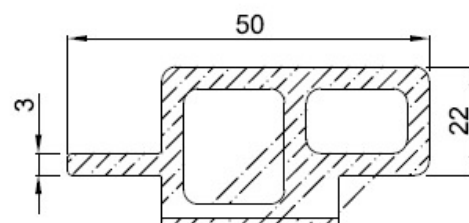


2208

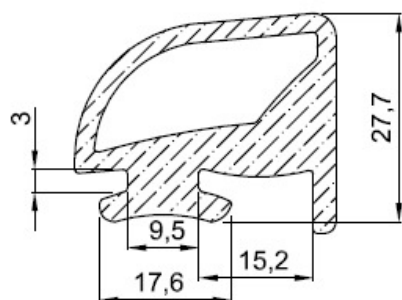

2212

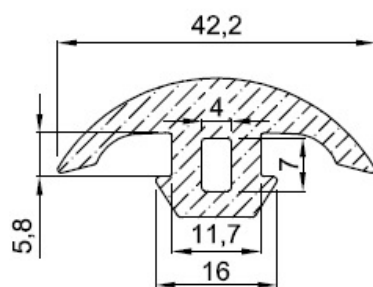

2205




2213


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

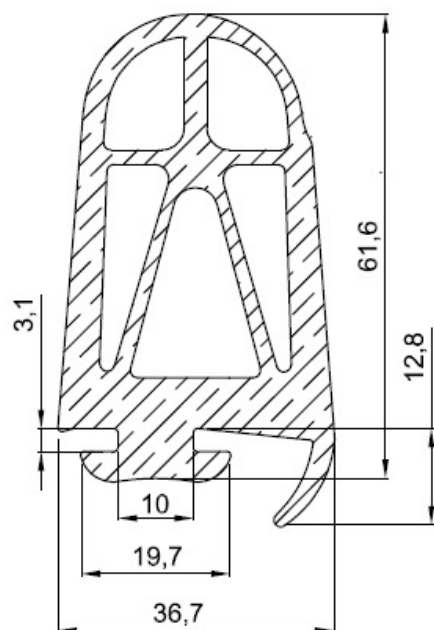
TIPO GEN.




2248

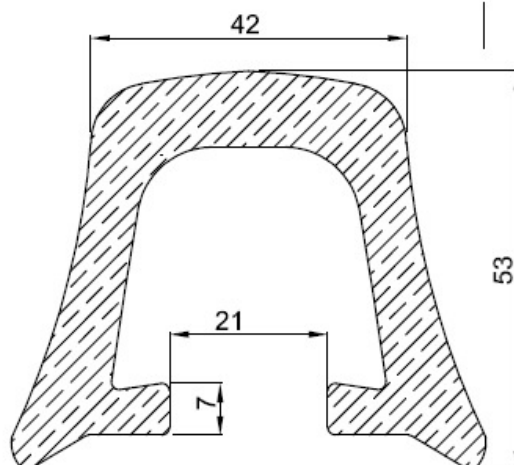


2240




2886




2209

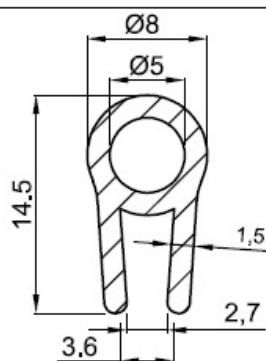


2042

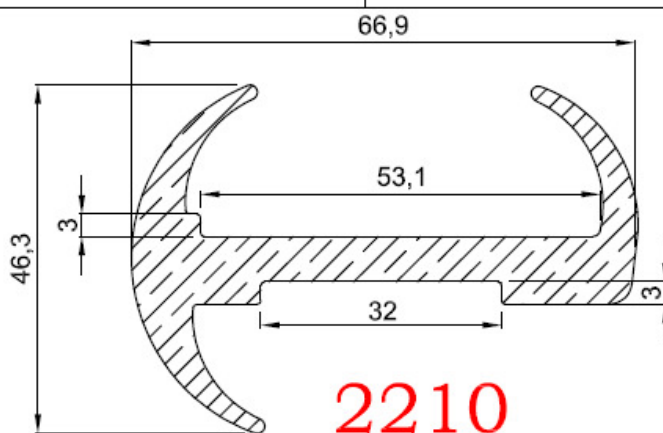


2210



2221

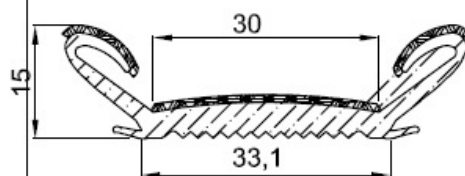

2220

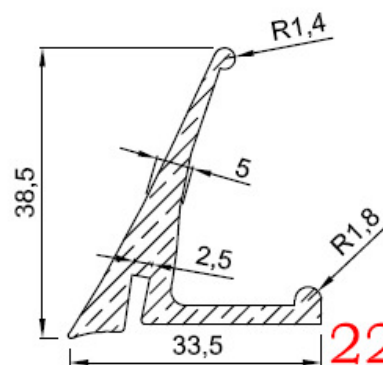


2218


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a		Tolleranze dimensionali dei filetti in cava secondo UNI ISO 1501									
		0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe	E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

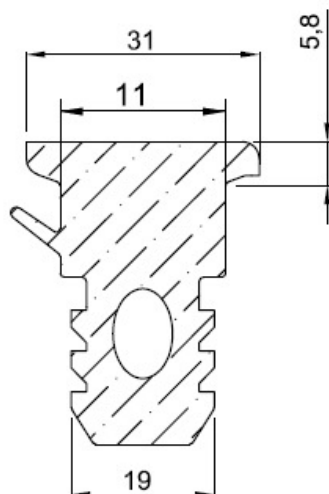
TIPO GEN.




2875

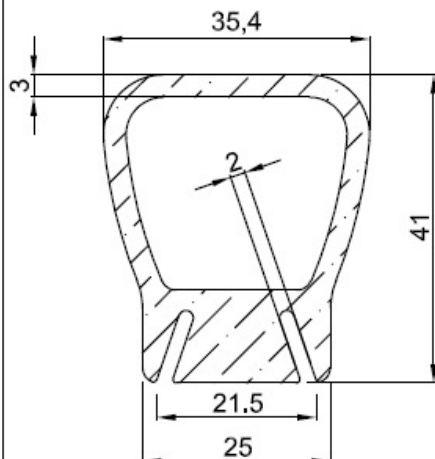


2885




2159

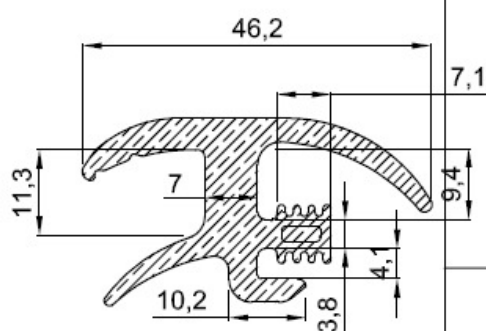


2203




2202

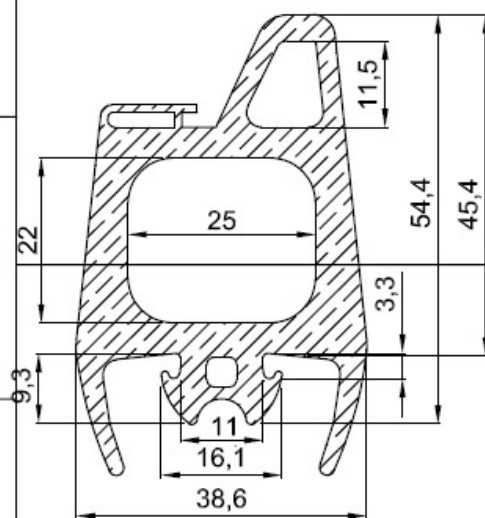


2204

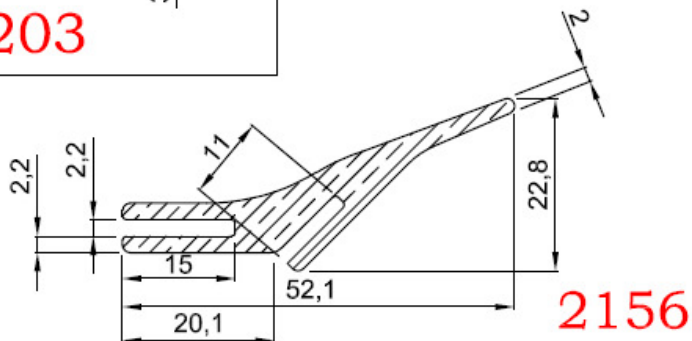

2156

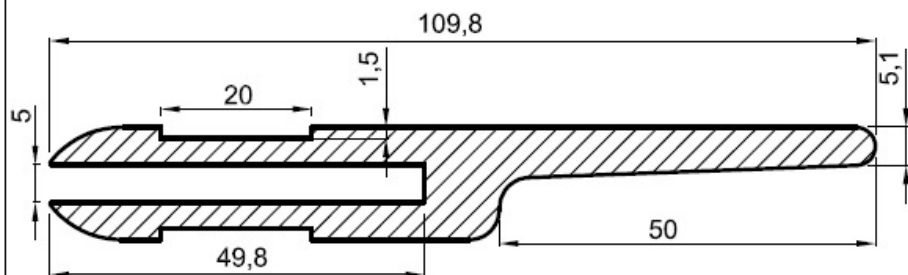













2246

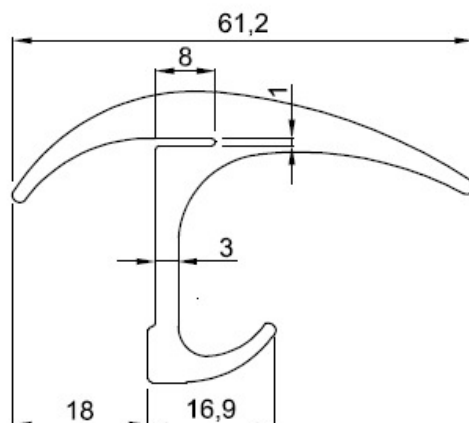

2157

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

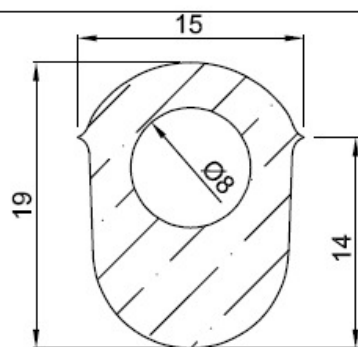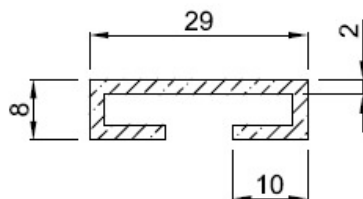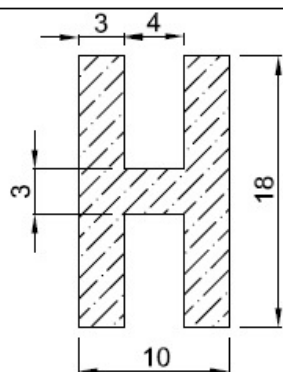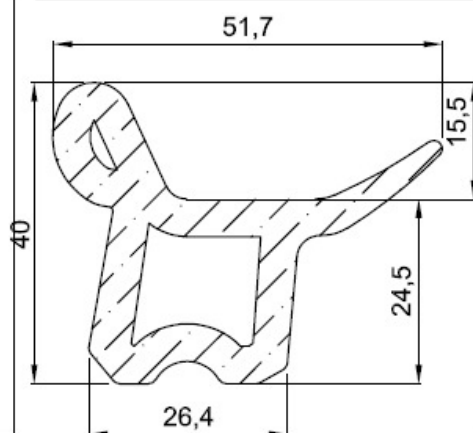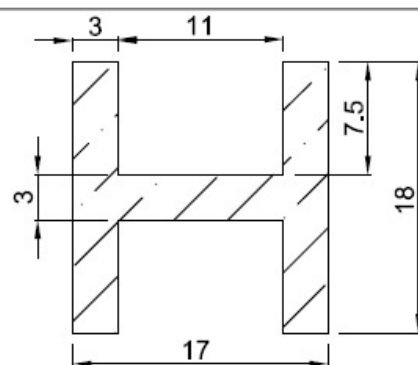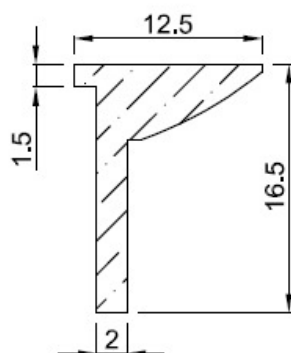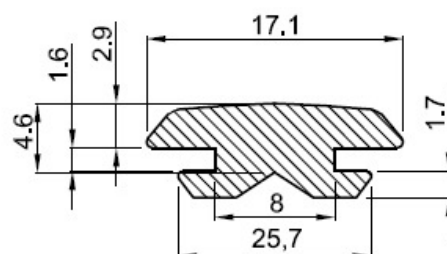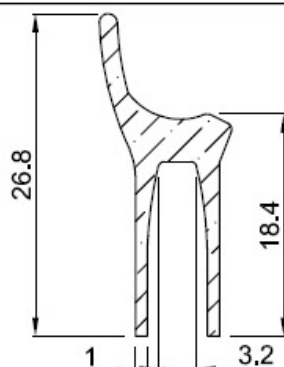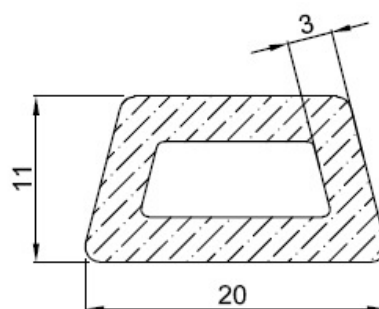
3086

3087

3092
TIPO GEN.

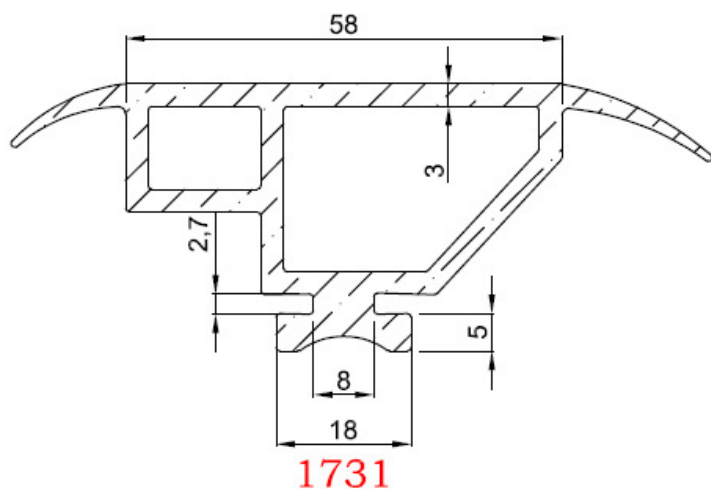3098

3096

3099

3100

1331

2395

3105

3101

3112


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO GEN.



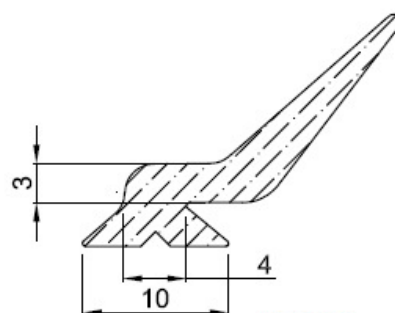
1731




3106




3103




3102




3070 PVC

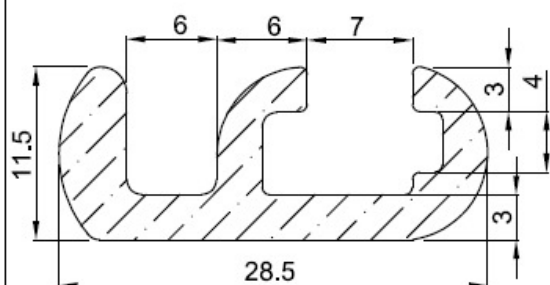


3104

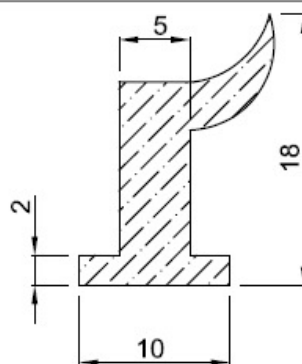


3108

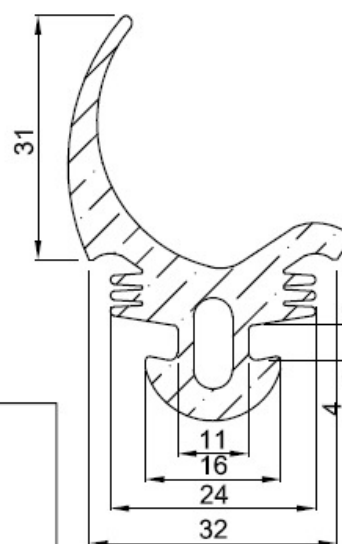

3069

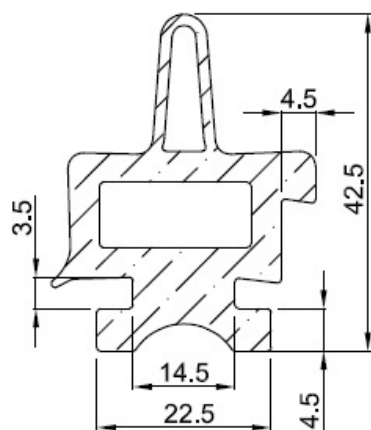













1749

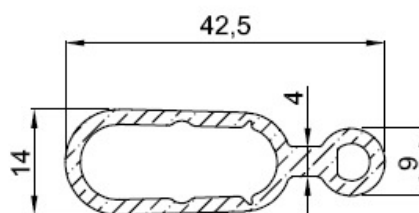

3071

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302










da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

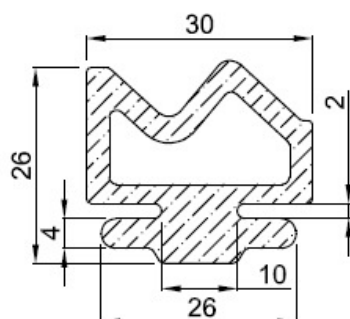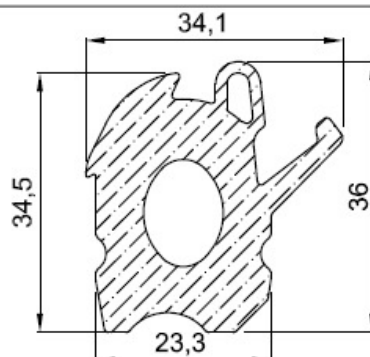TIPO GEN.

1742

1777

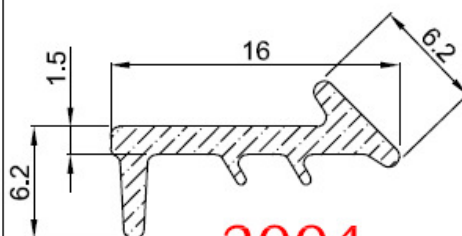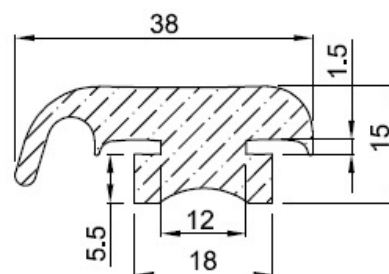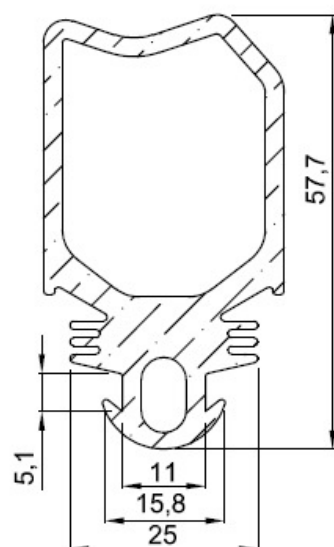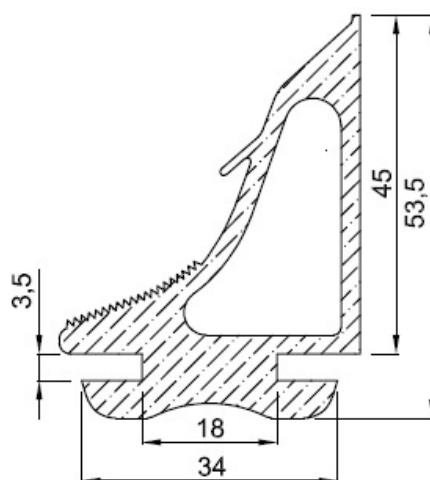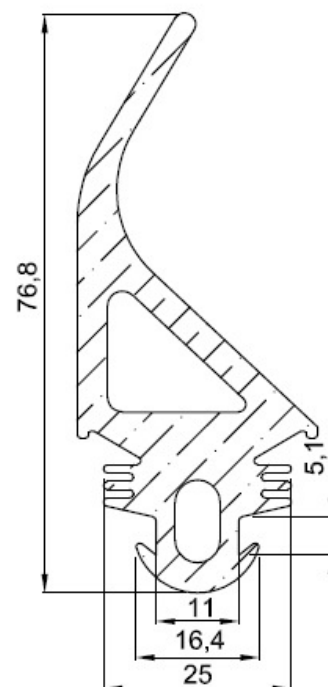2888

1936

1146

1155

2890

2893

2894

2938

2994

3001

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00



TIPO GEN.











2994

3005/2468

3002

3003

3004

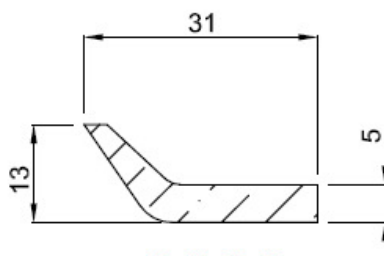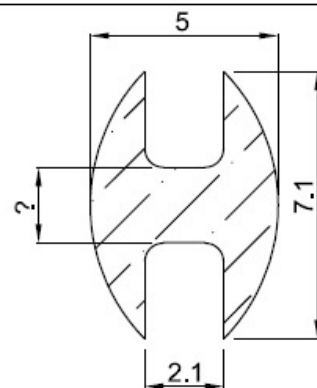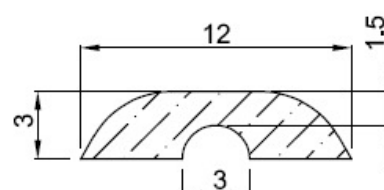1672

2999

2897

3000

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

TOLLERANZE DIMENSIONALI DEI TRATTEATI IN COPPIA SECONDO UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

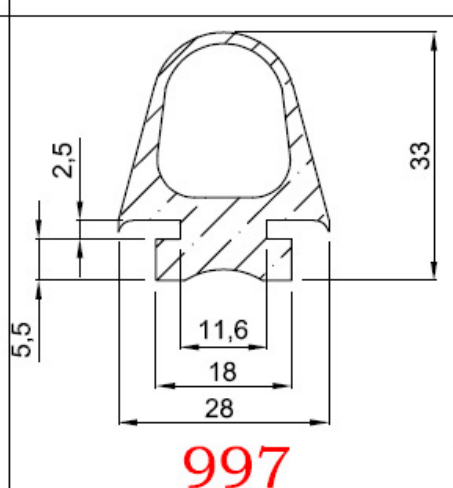
TIPO GEN.


3006

3007


3008

3011

3012

3013

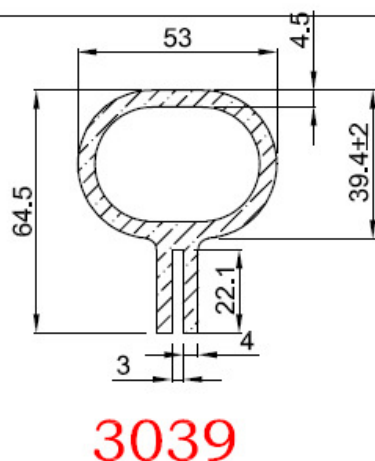3016

3018

3019

3022

3023

3024

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a Classe		0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
		1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
E2		±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

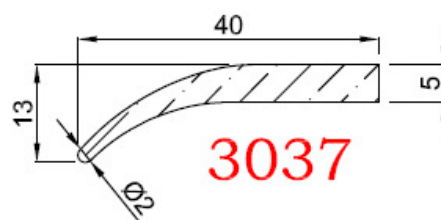


997




3039


TIPO GEN.




3037

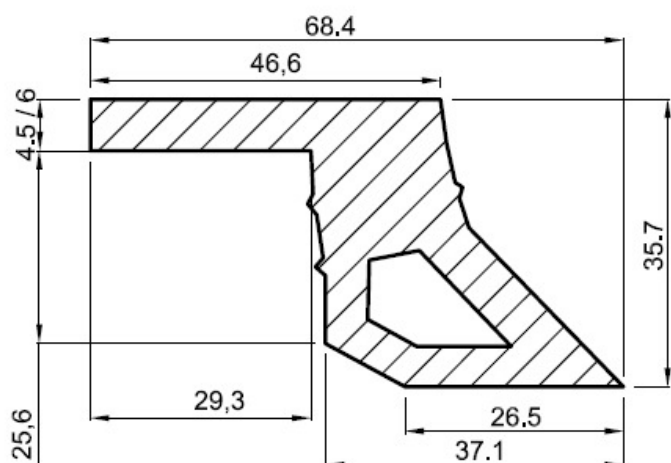


3046




3063




3050




3051




3052



1129

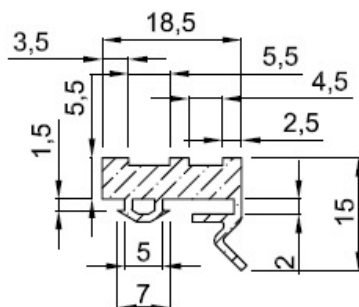













3049

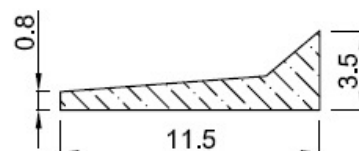

3053


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

TOLLERANZE DIMENSIONALI DEI TRATTEATI IN GOMMA SECONDO UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

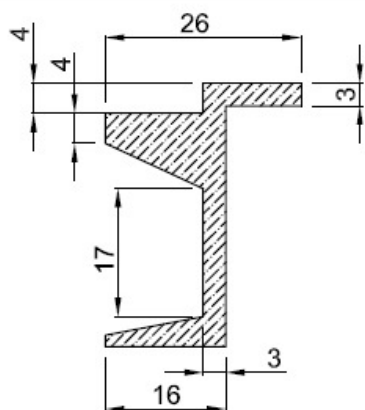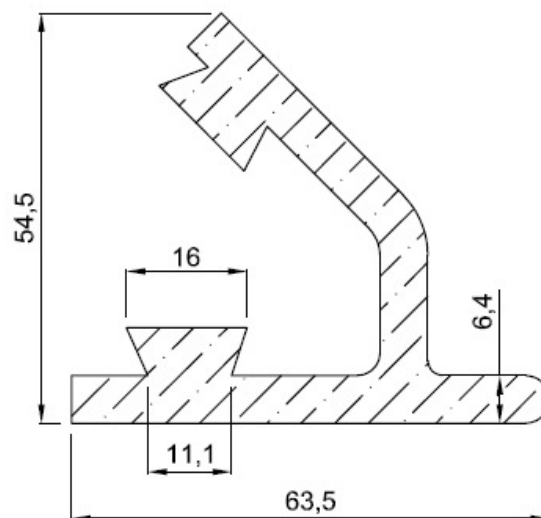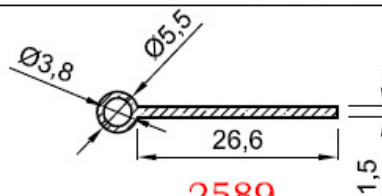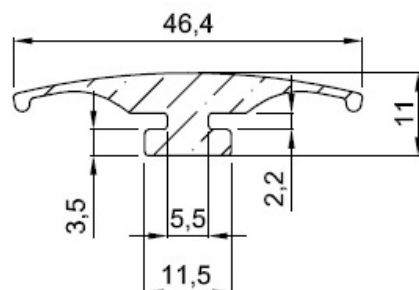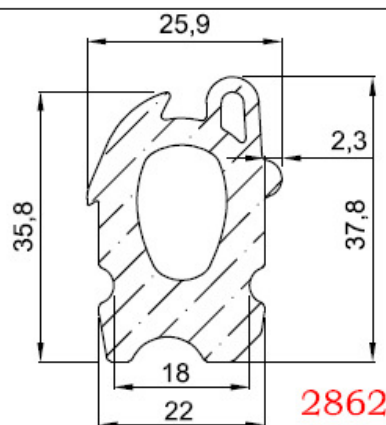TIPO GEN.

2864

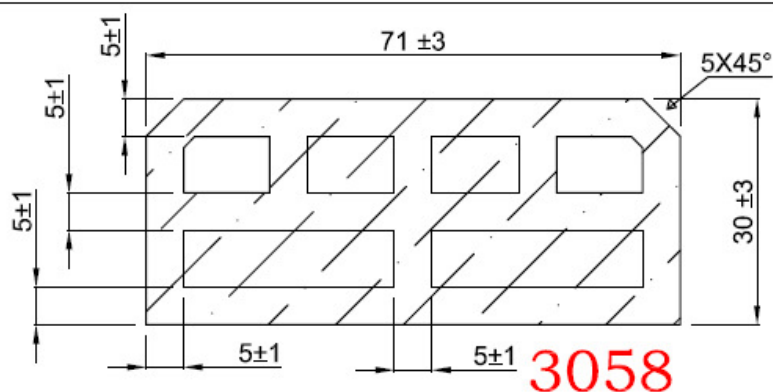2871

2828

2837

2589

2838

2829

2839

2834

2862

2841

2847


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00




3058

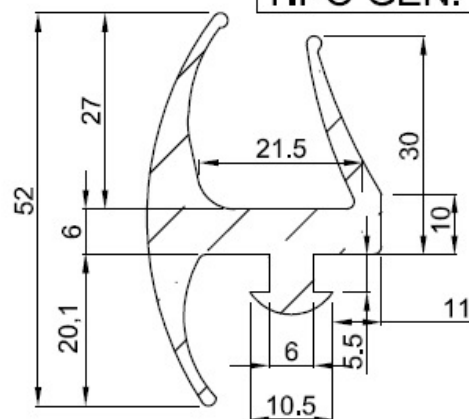
TIPO GEN.




3047

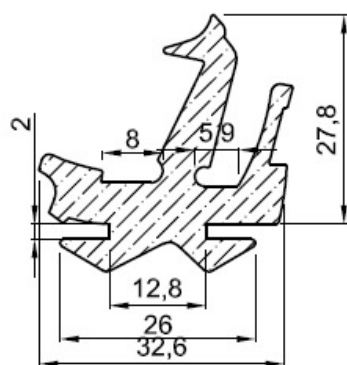


3060

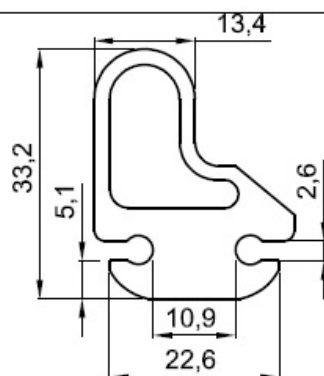


3061

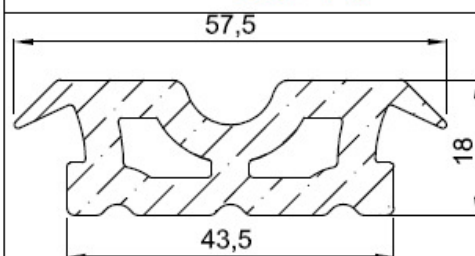


3057

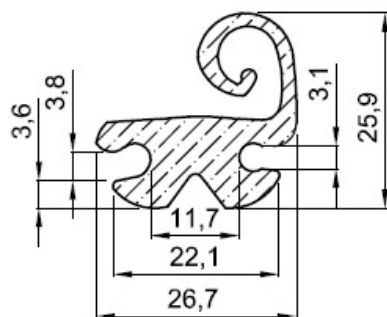


3062




3067




3065



3064















3066



1748












TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

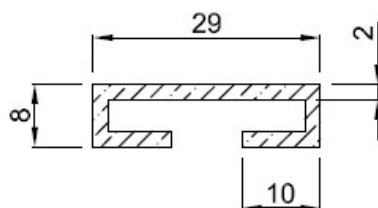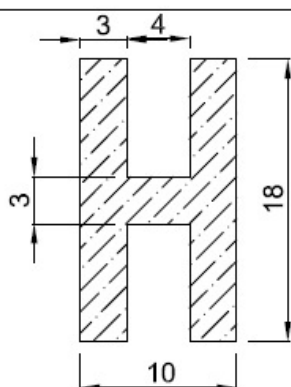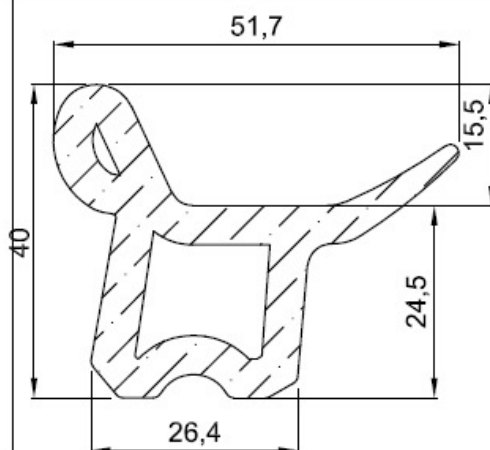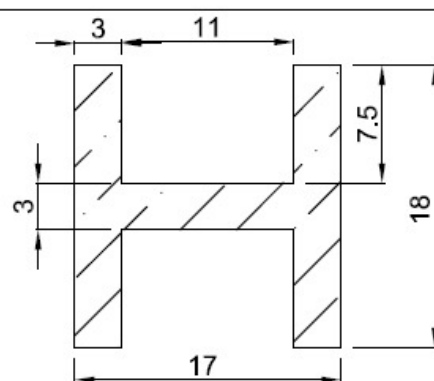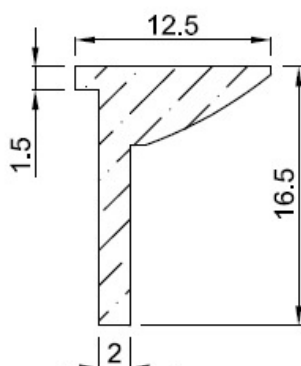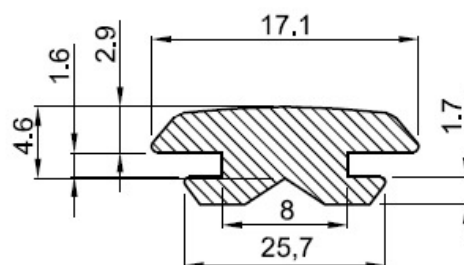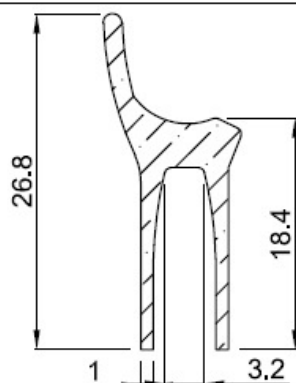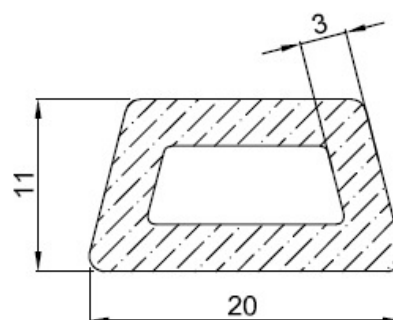TIPO GEN.

3086

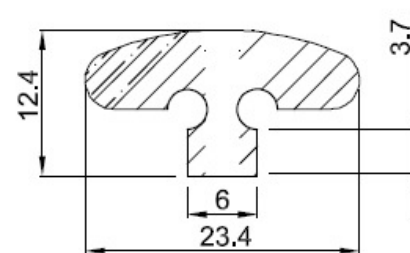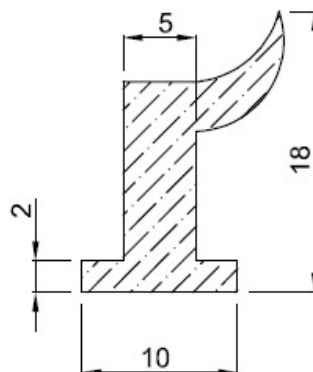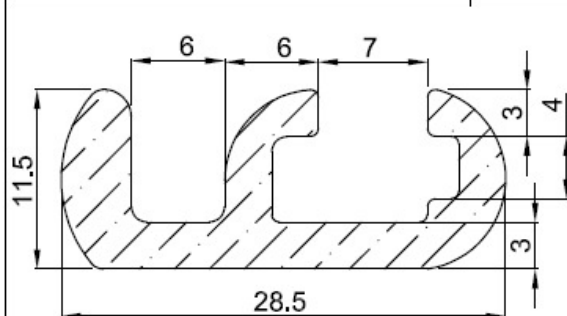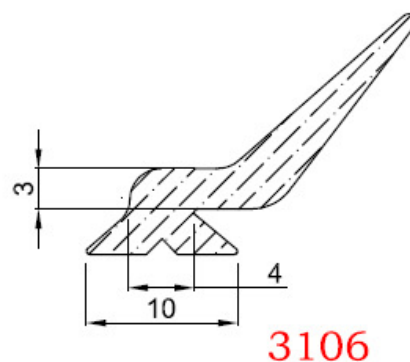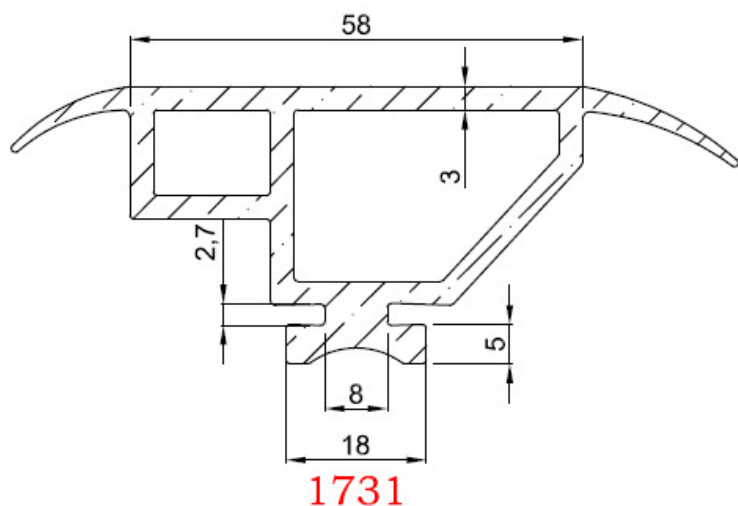3087

3092

3098

3096

3099

3100

1331

2395

3105

3101

3112

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

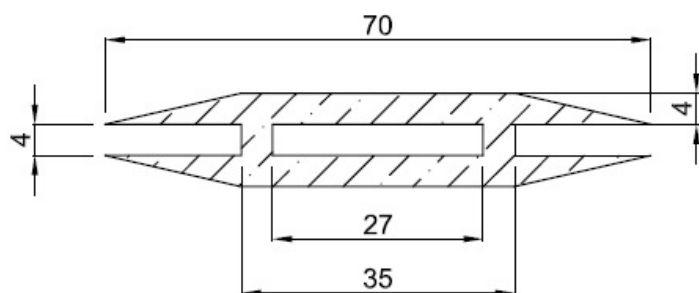TIPO GEN.



TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

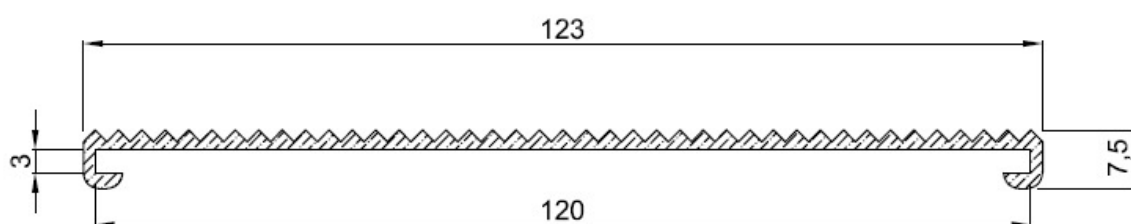
TIPO GEN.




3142




3145




3144

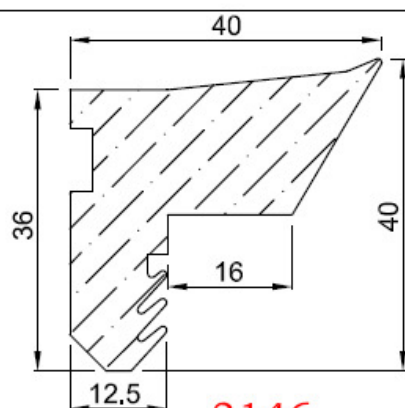


3146




3149




3150



3151

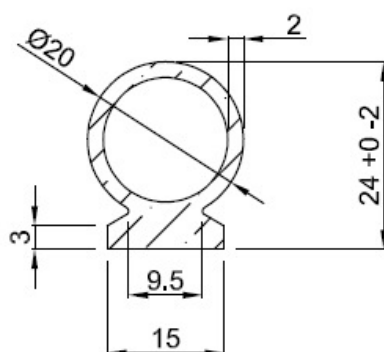












3154



2714


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

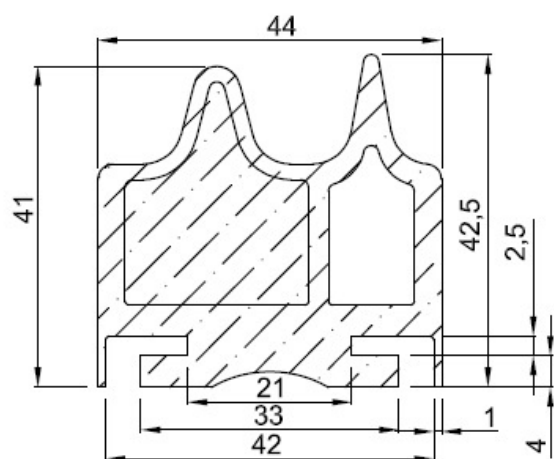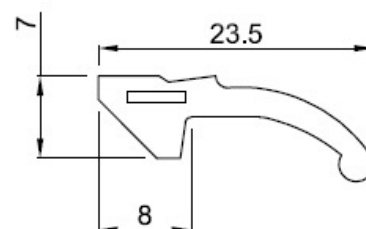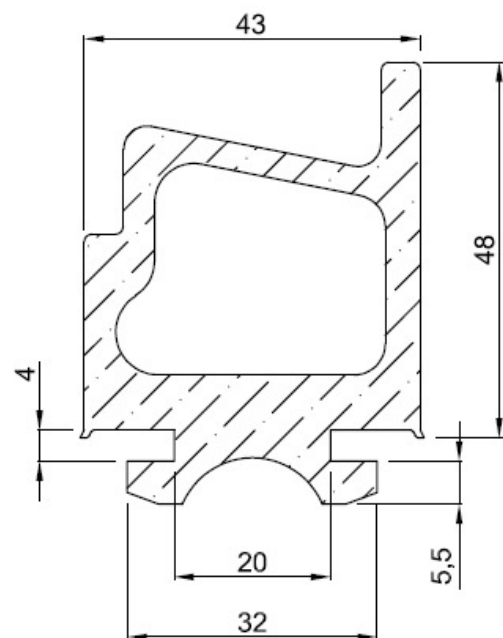

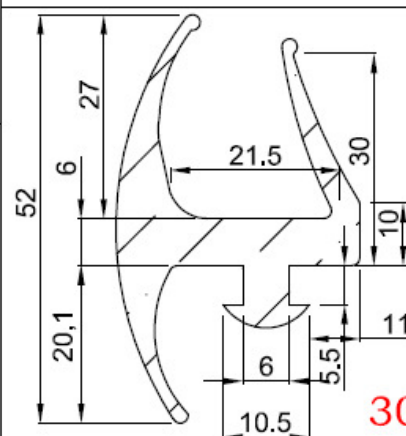
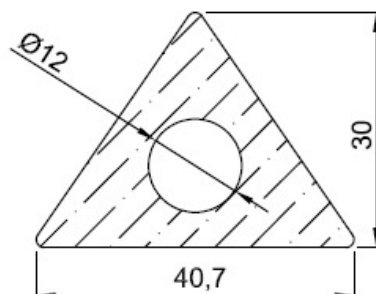

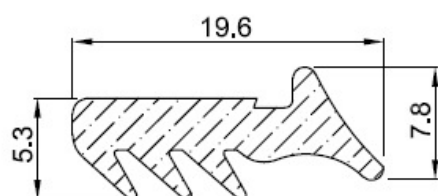
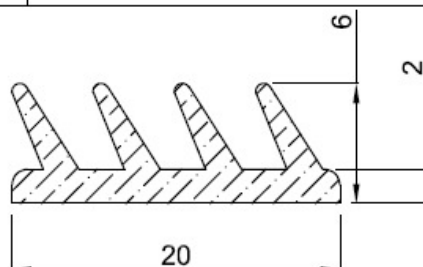
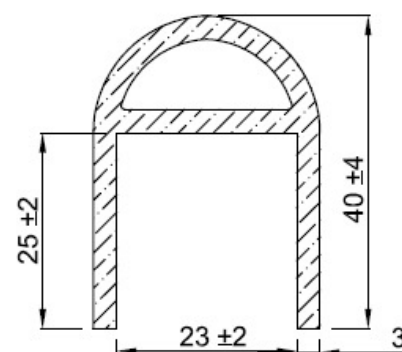
TIPO GEN.

3195

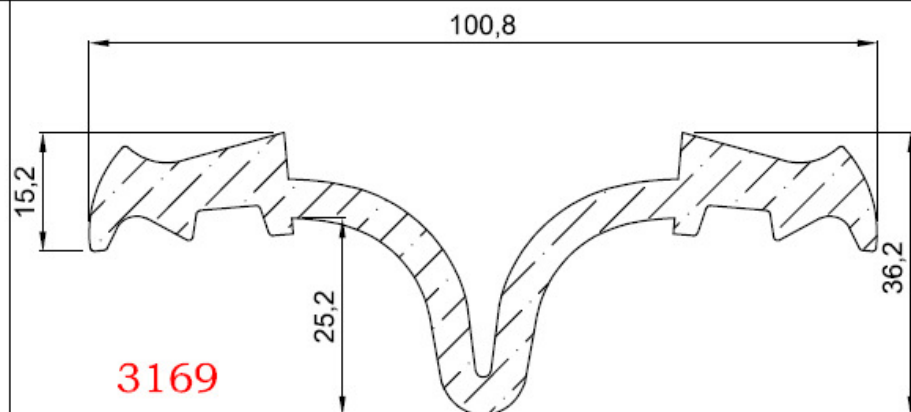3163

3158

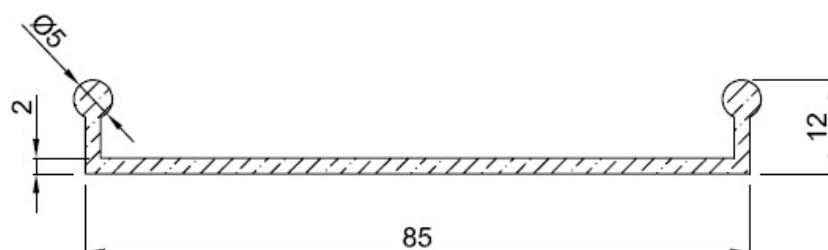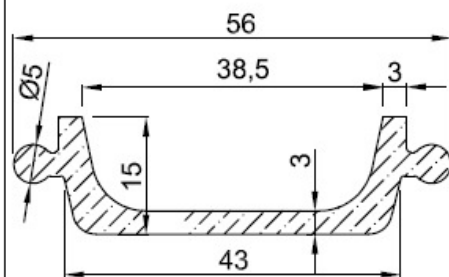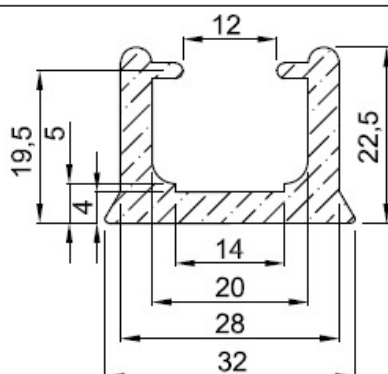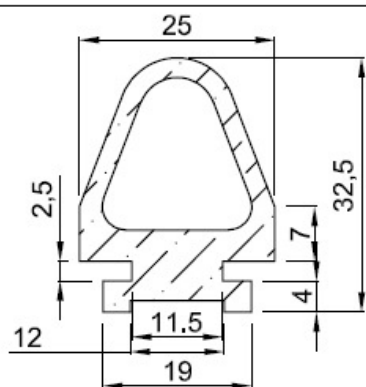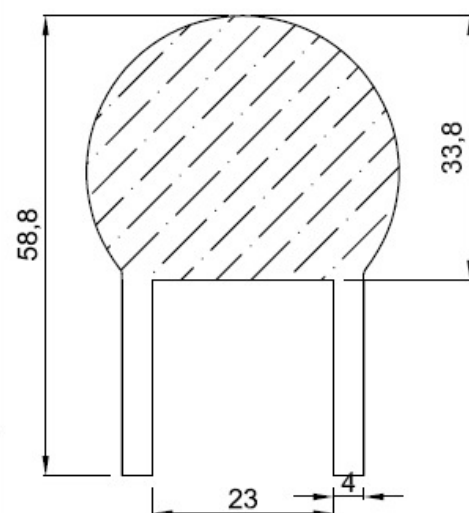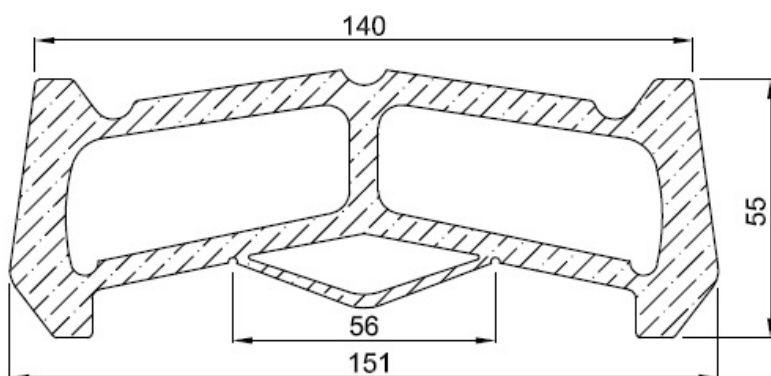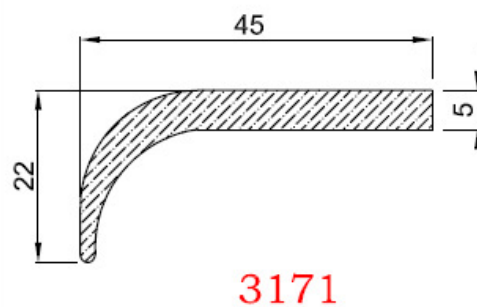3162

1868

3047

3159

3160

1866

1867

3167

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00













TIPO GEN.















TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

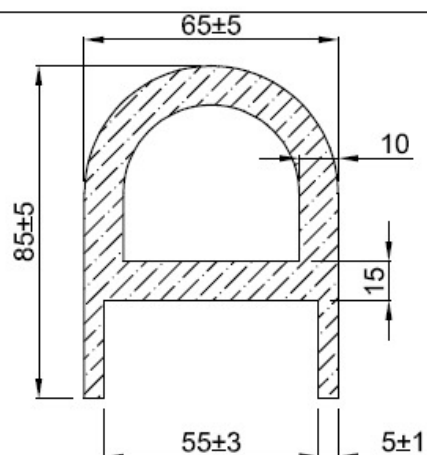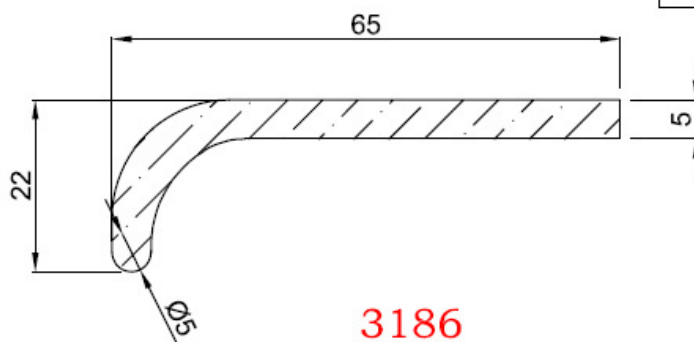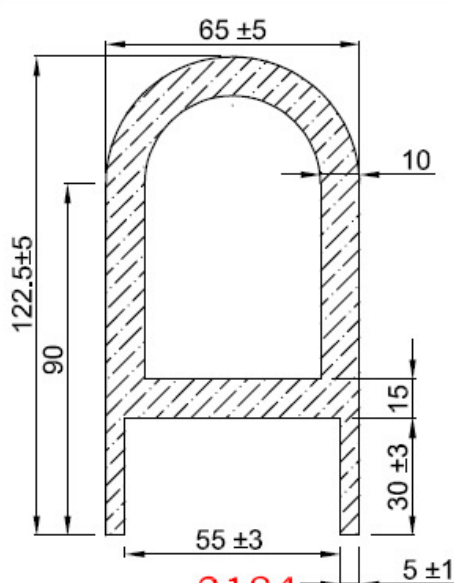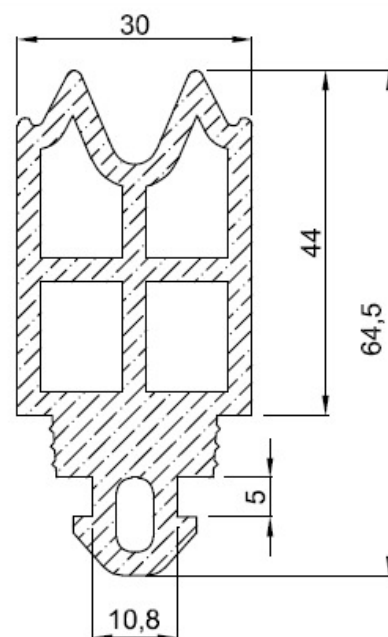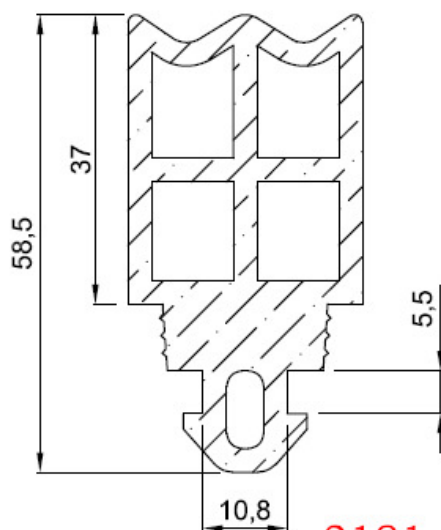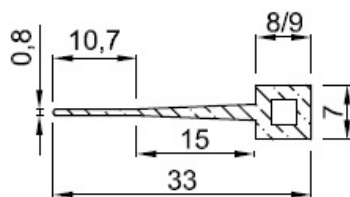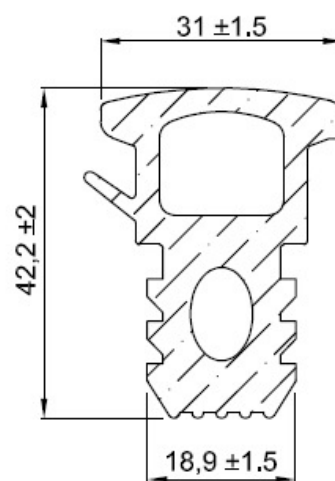TIPO GEN.

3185

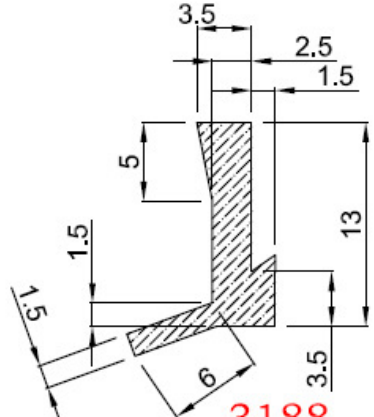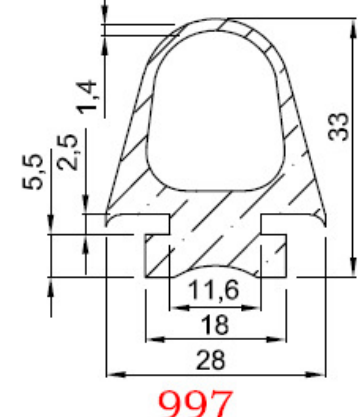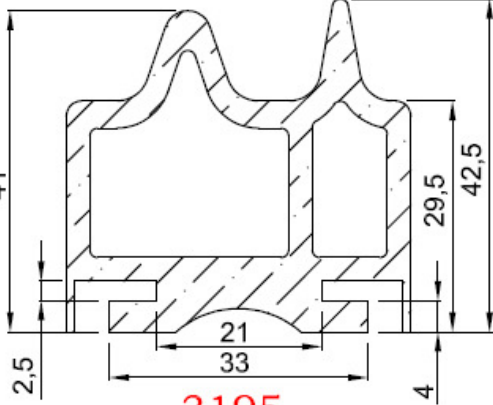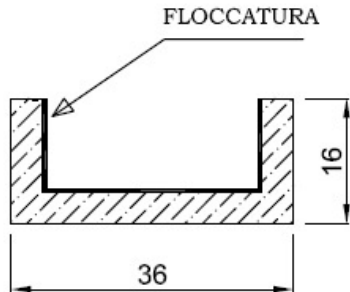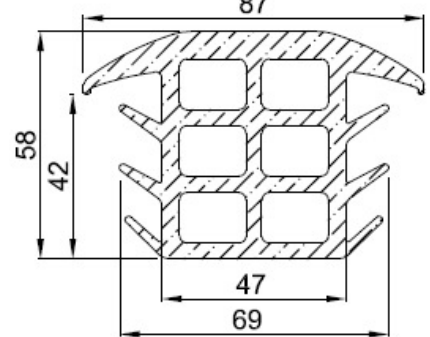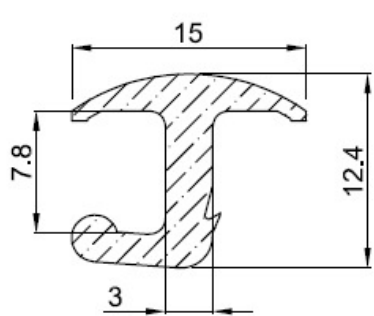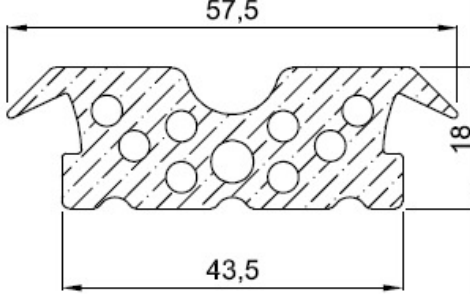3186

3184

2026

3182

3187

3181

3183

3192

2875




TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

 3188	 997	TIPO GEN.  3156
 3195	FLOCCATURA  1116B	ZONE FLOCCATE  3027
FLOCCATURA  3089	 3133	 3156
 3114	 3115	 3118

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302


da mm	0,0	1,6	2,6	4,1	6,4	10,1	16,1	25,1	40,1	63,1
a	1,5	2,5	4,0	6,3	10,0	16,0	25,0	40,0	63,0	100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

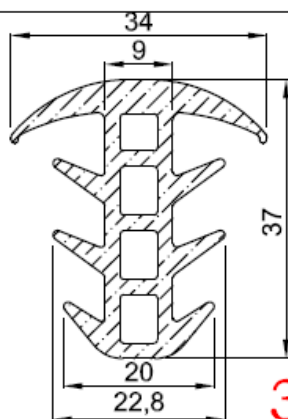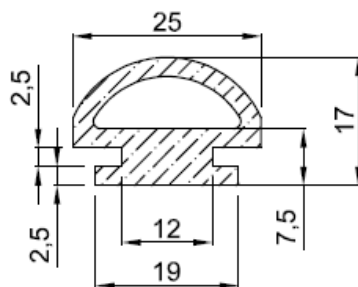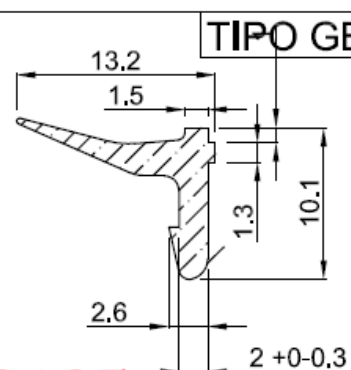
3131

3132

3135

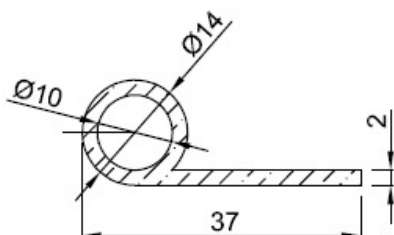
TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI 3302

da mm a	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe										
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00


TIPO P



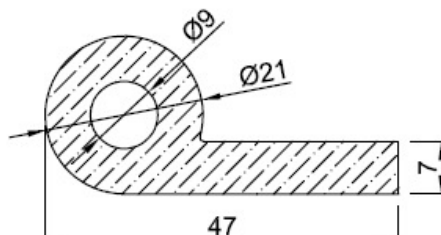
2770




162




2008

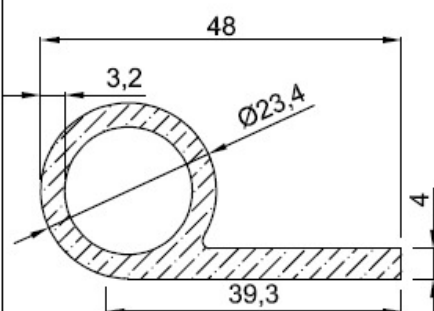


2621




2052




2382




2738




1267

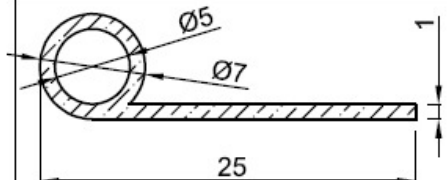


2043




2216




1909




3025



1525

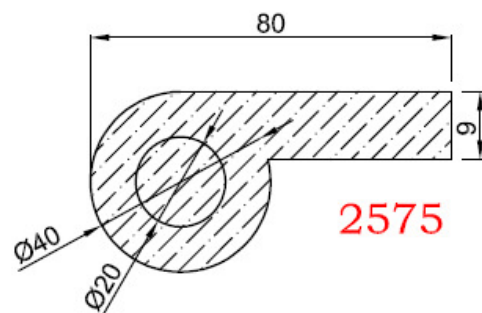

2575

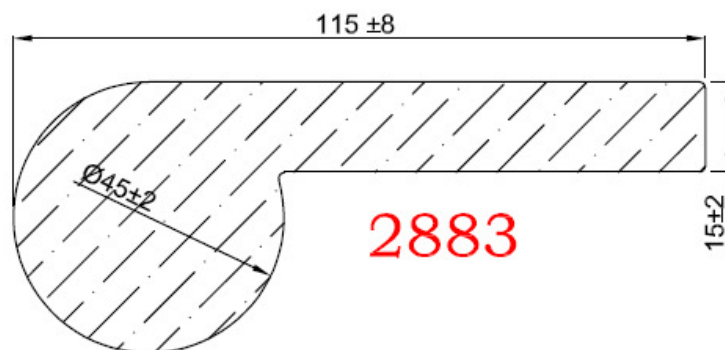


2883


TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

TOLLERANZE DIMENSIONALI DEI FORI IN CUIVA SECONDO UNI ISO 3302										
da mm a Classe	0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
E2	±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00

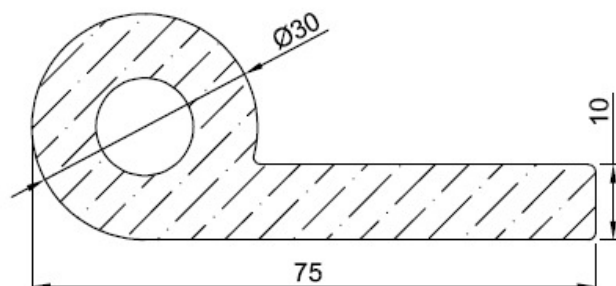
TIPO P




2644




1667




2891




2001

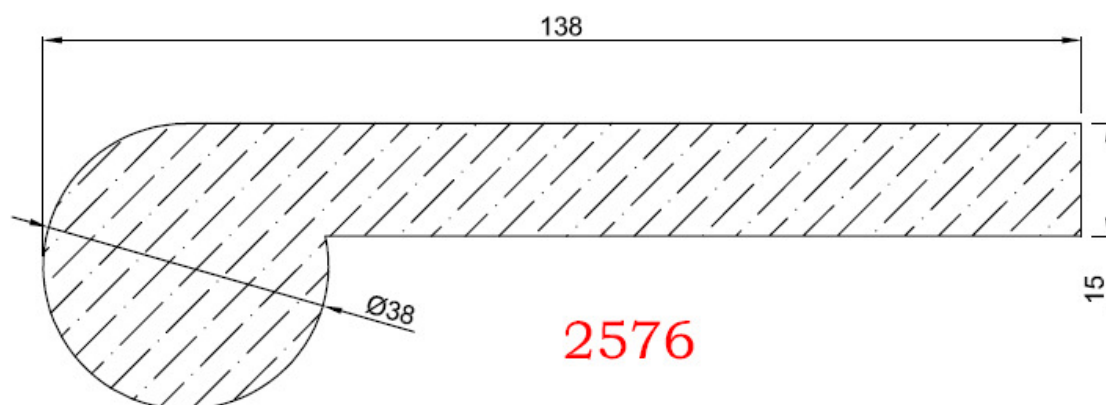


2576

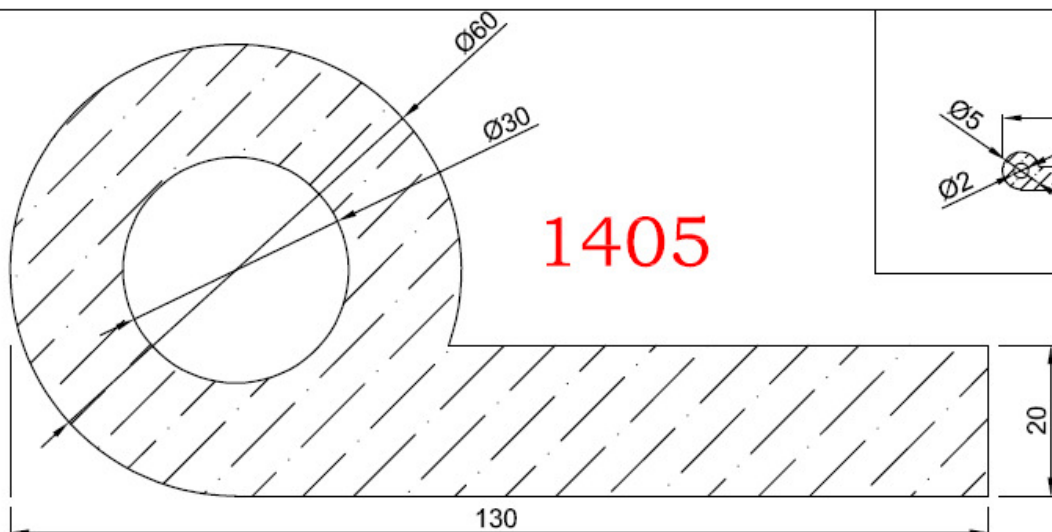


1405




3009



1526



1527



1901

TOLLERANZE DIMENSIONALI DEI TRAFILATI IN GOMMA SECONDO UNI ISO 3302

da mm a		0,0 1,5	1,6 2,5	2,6 4,0	4,1 6,3	6,4 10,0	10,1 16,0	16,1 25,0	25,1 40,0	40,1 63,0	63,1 100,0
Classe											
E2		±0,25	±0,35	±0,40	±0,50	±0,70	±0,80	±1,00	±1,30	±1,60	±2,00